

1

2



**ZigBee<sup>®</sup>**  
**Alliance**

3

4

5 **ZigBee Document 15-0029-06**

6 **ZigBee PRO Core R22 Draft Layer PICS and**  
7 **Stack Profiles**

8 **Revision 06**

9

10 February 2017

11 **Sponsored by:**  
12 ZigBee Alliance

13 **Accepted for release by:**  
14 ZigBee Alliance Board of Directors.

15 **Abstract:**  
16

17 **Keywords:**  
18 ZigBee, ZigBee-PRO, Stack profile, Architecture.

19

---

Copyright © 1996-2017 by the ZigBee Alliance.  
508 Second Street, Suite 206, Davis, CA 95616, USA <http://www.zigbee.org>  
All rights reserved.

Permission is granted to members of the ZigBee Alliance to reproduce this document for their own use or the use of other ZigBee Alliance members only, provided this notice is included. All other rights reserved. Duplication for sale, or for commercial or for-profit use is strictly prohibited without the prior written consent of the ZigBee Alliance.

20 Copyright © ZigBee Alliance, Inc. (2008-2017). All rights Reserved. This information within this document is the property of  
21 the ZigBee Alliance and its use and disclosure are restricted.  
22 Elements of ZigBee Alliance specifications may be subject to third party intellectual property rights, including without limitation,  
23 patent, copyright or trademark rights (such a third party may or may not be a member of ZigBee). ZigBee is not responsible and  
24 shall not be held responsible in any manner for identifying or failing to identify any or all such third party intellectual property  
25 rights.  
26 This document and the information contained herein are provided on an "AS IS" basis and ZigBee DISCLAIMS ALL  
27 WARRANTIES EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO (A) ANY WARRANTY THAT THE USE OF THE  
28 INFORMATION HEREIN WILL NOT INFRINGE ANY RIGHTS OF THIRD PARTIES (INCLUDING WITHOUT LIMITATION  
29 ANY INTELLECTUAL PROPERTY RIGHTS INCLUDING PATENT, COPYRIGHT OR TRADEMARK RIGHTS) OR (B) ANY  
30 IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, TITLE OR NON-  
31 INFRINGEMENT. IN NO EVENT WILL ZIGBEE BE LIABLE FOR ANY LOSS OF PROFITS, LOSS OF BUSINESS, LOSS OF  
32 USE OF DATA, INTERRUPTION OF BUSINESS, OR FOR ANY OTHER DIRECT, INDIRECT, SPECIAL OR EXEMPLARY,  
33 INCIDENTAL, PUNITIVE OR CONSEQUENTIAL DAMAGES OF ANY KIND, IN CONTRACT OR IN TORT, IN  
34 CONNECTION WITH THIS DOCUMENT OR THE INFORMATION CONTAINED HEREIN, EVEN IF ADVISED OF THE  
35 POSSIBILITY OF SUCH LOSS OR DAMAGE. All Company, brand and product names may be trademarks that are the sole  
36 property of their respective owners.  
37 The above notice and this paragraph must be included on all copies of this document that are made.

38  
39 ZigBee Alliance, Inc.  
40 508 Second Street  
41 Suite 206  
42 Davis, CA 95616  
43 USA  
44

## 45 **Contact information**

46 Much of the information in this document is preliminary and subject to change. Members of the ZigBee  
47 Working Group are encouraged to review and provide inputs for this proposal. For document status  
48 updates, please contact:

49 Michael Cowan  
50 639 Davis Drive  
51 Morrisville, NC, USA 27560  
52 [michael.cowan@sensus.com](mailto:michael.cowan@sensus.com)  
53 Desk Phone: 919-317-6320  
54 Lab Phone: 919-317-6184  
55  
56

57 You can also submit comments using the ZigBee Alliance reflector. Its web site address is:

58 [www.zigbee.org](http://www.zigbee.org)

59 The information on this page should be removed when this document is accepted.

## 60 Participants

61 The following is a list of those who were members of the ZigBee Alliance PRO Core Stack Working  
62 Group leadership when this document was released:

63 **Robert Alexander:** *Chair*

64 **Arasch Honarbacht:** *Vice Chair*

65 **Tim Gillman:** *Secretary*

66

67 The editing team was composed of the following members:

68

69 Colin Faulkner: EDMI, Ltd, Technical Editor ZigBee PRO Core Specification

70 Ian Winterburn: Landis&Gyr, Technical Editor ZigBee PRO Energy Specification

71 Michael Cowan: Sensus Technical Editor ZigBee PRO Energy Test Spec and PICS

72

73

74 Additionally, the following individuals contributed to the PICS document:

75 Robert Alexander Silicon Laboratories, Inc.

76 Arasch Honarbacht ubisys technologies GmbH

77 Chris Brandson Exegin

## Table of Contents

80	1	Introduction.....	1
81	1.1	Scope.....	1
82	1.2	Purpose.....	1
83	2	References.....	2
84	2.1	ZigBee Alliance documents.....	2
85	2.2	IEEE documents.....	2
86	2.3	ETSI documents.....	2
87	3	Definitions.....	3
88	4	Acronyms and abbreviations.....	4
89	5	General description.....	5
90	6	Knob settings.....	6
91	6.1	Introduction.....	6
92	6.2	Network settings.....	6
93	6.3	Application settings.....	6
94	6.4	Security settings.....	7
95	7	Functional description.....	8
96	7.1	Device roles.....	8
97	7.2	ZigBee: Compatibility with Other Feature sets.....	8
98	7.3	ZigBee-PRO: Feature set.....	9
99	7.4	Binding tables.....	9
100	7.5	Multicast mechanism and groups.....	9
101	7.6	Trust Center Policies and Security Settings.....	9
102	7.7	Battery powered devices.....	9
103	7.8	Mains powered devices.....	10
104	7.9	Persistent storage.....	10
105	7.10	Address Reuse.....	10
106	7.11	Duty cycle limitations and fragmentation.....	10
107	7.11.1	Vulnerability join.....	10
108	7.11.2	Pre-installation.....	10
109	7.12	Security.....	10
110	7.12.1	Security Modes within PRO Networks.....	11
111	8	Instructions for completing the PICS proforma.....	12
112	9	Identification of the implementation.....	13
113	10	Protocol implementation conformance statement (PICS) proforma.....	14
114	10.1	Abbreviations and special symbols.....	14
115	10.2	ZigBee device types.....	14
116	10.3	IEEE 802.15.4 PICS.....	15
117	10.3.1	FDT2 and FDT3 network join options.....	15
118	10.3.2	IEEE 802.15.4 PHY.....	16
119	10.3.3	IEEE 802.15.4 MAC.....	17
120	10.4	Network layer PICS.....	31
121	10.4.1	ZigBee network frame format.....	31
122	10.4.2	Major capabilities of the ZigBee network layer.....	32
123	10.5	Security PICS.....	54
124	10.5.1	ZigBee security roles.....	54
125	10.5.2	ZigBee trust center capabilities.....	55
126	10.5.3	Modes of operation.....	56

127	10.5.4	Security levels .....	56
128	10.5.5	NWK layer security .....	58
129	10.5.6	APS layer security .....	60
130	10.5.7	Application layer security .....	65
131	10.6	Application layer PICS .....	70
132	10.6.1	ZigBee security device types .....	70
133	10.6.2	ZigBee APS frame format .....	70
134	10.6.3	Major capabilities of the ZigBee application layer .....	71
135			

Rev 1.0 release

136

**List of Tables**

137 Table 1 – Document revision change history ..... viii  
138 Table 2 – Network settings for this feature set..... 6  
139 Table 3 – Application settings for this feature set ..... 6  
140 Table 4 – Security settings for this feature set..... 7  
141

Rev 1.0 release

142 **Change history**

143 Table 1 shows the change history for this specification.

144 **Table 1 – Document revision change history**

Revision	Description
00	Original version based on 08-0006-05 snap shoot in Dec 2014.
01	Baseline original -00 document to ZigBee Document 08-0006-05 (R21 rev 1.0 equivalent document with all changes accepted) ZigBee PRO/2007 Layer PICS and Stack Profiles then added in R22 changes based on R22 Combined Document (Specification) dated Oct 8, 2015 10:37 AM.
02	Addressed All rev 0.7 comments and updated document for rev 0.7 re-ballot
03	Addressed All rev 0.7 re-ballot comments and updated document for rev 0.7 release
04	Address deferred rev 0.7 comments – comment 303 (Chris Brandson) fix section numbers references in PICS to match rev 0.9 PRO CORE Specification section numbers. Add update fixes for CCBs:  CCB 2091 – NLF27 - Number of Entries in End Device Neighbor Table increase to 5 per specification section 3.6.1.4.2.1  CCB 2137 – Modify NLF4 slightly to note that this is for forming *centralized* networks. and AZD31 - Add a separate PICs item for forming *distributed* networks = AZD299 added. Same text for NLF4 except it would be mandatory for both FDT1 and FDT2.  CCB 2144 – NDF106 – replace orphan notification and keep alive methods with end device timeout keep alive methods.  CCB 2178 – Trust center must be collocated with ZC (short address 0x0000) throughout network life – SR1.  CCB 2239 – Update NDF108 and NDF109 both conditional on NDF105 CCB 2240 – if support GP need to support list of items in PICS defined in CCB
05	Added Oct 17 2016 rev 0.9 comments from KAVI and release for rebalot comments
06	No rev 0.9 re-ballot comments in KAVI, updated for Rev 1.0 release plans.

145

146



## 147 **1 Introduction**

148 To evaluate conformance of a particular implementation, it is necessary to have a statement of which  
149 capabilities and options have been implemented for a given standard. Such a statement is called a protocol  
150 implementation conformance statement (PICS).

### 151 **1.1 Scope**

152 This document provides the protocol implementation conformance statement (PICS) proforma for  
153 ZigBee R22 Draft specification (05-3474-22) in compliance with the relevant requirements, and in  
154 accordance with the relevant guidance, given in ISO/IEC 9646-7. The specification adds multiband  
155 functionality support which required changes to PHY/MAC and network layers. In addition ZigBee  
156 2007 was deprecated by the ZigBee Alliance therefore all ZigBee 2007 stack protocol  
157 implementation conformance statement (PICS) have been removed from this document. Starting with  
158 R22 and later, only ZigBee PRO stack will be supported per ZigBee 3.0 inter-operability marketing  
159 decision.

160

### 161 **1.2 Purpose**

162 The supplier of a protocol implementation claiming to conform to the ZigBee standard shall complete  
163 the following PICS proforma and accompany it with the information necessary to identify fully both  
164 the supplier and the implementation.

165

166 The protocol implementation conformance statement (PICS) of a protocol implementation is a  
167 statement of which capabilities and options of the protocol have been implemented. The statement is in  
168 the form of answers to a set of questions in the PICS proforma. The questions in a proforma consist of  
169 a systematic list of protocol capabilities and options as well as their implementation requirements. The  
170 implementation requirement indicates whether implementation of a capability is mandatory, optional,  
171 or conditional depending on options selected. When a protocol implementer answers questions in a  
172 PICS proforma, they would indicate whether an item is implemented or not, and provide explanations  
173 if an item is not implemented.

## 174 2 References

175 The following standards and specifications contain provisions, which through reference in this document  
176 constitute provisions of this specification. All the standards and specifications listed are normative  
177 references. At the time of publication, the editions indicated were valid. All standards and specifications  
178 are subject to revision, and parties to agreements based on this specification are encouraged to investigate  
179 the possibility of applying the most recent editions of the standards and specifications indicated below.

### 180 2.1 ZigBee Alliance documents

- 181 [R1] ZigBee document 05-3474r22, ZigBee draft specification release 22, ZigBee Core Stack  
182 Group
- 183 [R2] ZigBee 04-0140r05, ZigBee Protocol Stack Settable Values (knobs) release 05, ZigBee  
184 Architecture Working Group
- 185 [R3] ZigBee document 04-0319r01, ZigBee IEEE 802.15.4 PHY & MAC Layer Test Specification  
186 release r01
- 187 [R4] ZigBee document 08-5195r02, ZigBee Trust Centre Best Practices, ZigBee Security Task  
188 Group.
- 189 [R5] CEPT/ERC/REC 70-03: "Relating to the use of Short Range Devices (SRD)". (13-0390-02).  
190 Version after Public Consultation CEPT SRDMG#60 13th December 2013.
- 191 [R6] EN 300 220-1 "Electromagnetic compatibility and Radio spectrum Matters (ERM); Short  
192 Range Devices (SRD); Radio equipment to be used in the 25 MHz to 1 000 MHz frequency  
193 range with power levels ranging up to 500 mW; Part 1: Technical characteristics and test  
194 methods" version 2.4.1 (13-391-00)
- 195 [R7] ZigBee 09-5499r26 Green Power Specification
- 196 [R8] ZigBee 14-0563-16 PRO Green Power Feature specification

### 198 2.2 IEEE documents

- 199 [R9] IEEE 802.15.4:2011 "IEEE Standard for Local and metropolitan area networks Part 15.4:  
200 Low-Rate Wireless Personal Area Networks (LR-WPANs)"
- 201 [R10] IEEE 802.15.4:2015 "IEEE Standard for Local and metropolitan area networks Part 15.4:  
202 Low-Rate Wireless Personal Area Networks (LR-WPANs)"
- 203 [R11] IEEE Standards Style Manual, published and distributed in May 2000 and last revised in  
204 2012. Available from  
205 <https://development.standards.ieee.org/myproject/Public/mytools/draft/styleman.pdf>

### 206 2.3 ETSI documents

- 207 [R12] ETSI TR 102 887-1 "Electromagnetic compatibility and Radio spectrum Matters (ERM); Short  
208 Range Devices; Smart Metering Wireless Access Protocol; Part 1: PHY layer" (13-0425-00)

209  
210

### 3 Definitions

<b>Feature set</b>	An collection of parameter values and configuration settings, collectively and loosely referred to as “knobs” in [R2], that determine the specific performance of a ZigBee stack variant and govern interoperability between stacks provided by different vendors.
<b>ZigBee 2.4 GHz Coordinator</b>	An IEEE 802.15.4-2011 PAN coordinator operating in a ZigBee 2.4 GHz network.
<b>ZigBee 2.4 GHz End Device</b>	An IEEE 802.15.4-2011 RFD participating in a ZigBee 2.4 GHz network, which is neither the ZigBee coordinator nor a ZigBee router.
<b>ZigBee 2.4 GHz Router</b>	An IEEE 802.15.4-2011 FFD participating in a ZigBee 2.4 GHz network, which is not the ZigBee coordinator but may act as an IEEE 802.15.4-2003 coordinator within its personal operating space, that is capable of routing messages between devices and supporting associations
<b>ZigBee Sub-GHz Router</b>	An IEEE 802.15.4-2015 FFD participating in a ZigBee Sub- GHz network, which is not the ZigBee coordinator but may act as an IEEE 802.15.4-2011 coordinator within its personal operating space, that is capable of routing messages between devices and supporting associations. ZigBee Sub-GHz Router (ZSR) is supported in R22 with power control on end device to routers and end devices to coordinators links. No power control for router to router, and router to coordinator links and devices should transmit at maximum power of + 14 dBm
<b>ZigBee Multi-MAC Selection Router</b>	An IEEE 802.15.4-2015 FFD participating in a ZigBee Sub-GHz <b>or</b> 2.4 GHz network but <b>not</b> in both bands. Power control only on Sub-GHz interface and not on the 2.4 GHz interface. Router in Sub-GHz mode in R22 will support power control on end device to routers and end devices to coordinators links. No power control for router to router, and router to coordinator links and devices should transmit at maximum power of + 14 dBm
<b>ZigBee Multi-MAC Switch Router</b>	An IEEE 802.15.4-2015 FFD participating in a ZigBee Sub-GHz <b>and</b> 2.4 GHz network. In R22 only allows a single ZigBee Multi-MAC Switch Router in the network integrated into the ZigBee Multi-MAC Switch Coordinator
<b>ZigBee Multi-MAC Switch Coordinator</b>	An IEEE 802.15.4-2015 PAN coordinator operating in a ZigBee 2.4 GHz network <b>and</b> in Sub-GHz band.
<b>ZigBee Multi-MAC Selection End Device</b>	An IEEE 802.15.4-2015 RFD participating in a ZigBee 2.4 GHz network <b>or</b> the Sub-GHz network which is neither the ZigBee coordinator nor a ZigBee router.
<b>ZigBee Sub-GHz End Device</b>	An IEEE 802.15.4-2015 RFD participating in a ZigBee Sub-GHz network which is neither the ZigBee coordinator nor a ZigBee router.

## 212 4 Acronyms and abbreviations

AODV	Ad-Hoc On-Demand Distance Vector
FFD	IEEE 802.15.4 Full Function Device
IEEE	Institute of Electrical and Electronic Engineers
PICS	Protocol Implementation Conformance Statement
RFD	IEEE 802.15.4 Reduced Function Device

213

Rev 1.0 release

## 5 General description

214  
215 The sections in this document are:

- 216 • Knob settings – details of values to be used for parameters specified in the ZigBee specification  
217 for tuning the operation of the ZigBee stack, including network, application and security  
218 settings.
- 219 • Functional description – further operational restrictions to be applied to all devices in this  
220 feature set where various approaches are otherwise supported by the ZigBee specification.
- 221 • Protocol implementation conformance statement (PICS) – a formal definition of functionality  
222 to be implemented in these devices.

223 These requirements aim to allow a designer to make necessary assumptions about what settings, features  
224 and safeguards will be in place in the networks in which a device will be deployed.

225 For clarity, settings applied to the ZigBee PRO Multi-MAC (PRO MM) feature set will be marked with  
226 the string **ZigBee PRO MM** and settings applied to the ZigBee-PRO feature set will be marked with the  
227 string **ZigBee-PRO**. Parameters that are unique to Multi-Band (MB or sub GHz interface) will be called  
228 out in PRO MM PRO MM PICS cells including unique timing. If timing and functionality the same as  
229 ZigBee PRO and **ZigBee PRO MM** the cells will be merged to flag timing, behavior, etc.. are the same  
230 on Sub GHz interface and 2.4 GHz interface as part of rev 0.9 release.

231 R22 stack depreciated ZigBee 2007 stack functionality therefore starting in R22 ZigBee 2007  
232 functionality can be removed from the R22 stack.

233 R22 sub GHz interface channel and channel spacing is targeted for Great Britain deployment and  
234 European country deployment.

235 Green Power is only certifiable on 2.4 GHz interface.

236 Functionality not supported by Great Britain will be called out in the PICS, for example sub GHz routers  
237 will not be supported.

238 Channel Change Manager is a function of the Multi-MAC (MM) Coordinator. Channel change is driven  
239 by head end systems which is out of scope of this document. MM and 2.4 GHz devices SHALL detect a  
240 channel change via a keep alive method or other methods and properly form network on new Sub-GHz  
241 channel and/or on new 2.4 GHz channel. Channel change can occur on Sub-GHz network or 2.4 GHz  
242 network or both networks. The reason for channel change is outside the scope of this document.

## 243 6 Knob settings

### 244 6.1 Introduction

245 This section specifies values for parameters specified in the ZigBee specification for tuning the operation  
 246 of the **ZigBee PRO MM** and ZigBee-PRO stack. This section describes settings for both **ZigBee PRO**  
 247 **MM** and ZigBee-PRO feature sets applied to the ZigBee R22 Specification ([R1])

### 248 6.2 Network settings

249 The network settings for the ZigBee PRO and **ZigBee PRO MM** feature sets are, for the most part,  
 250 described in the restricted PICS captured in Section 10.4. Those setting not covered by the PICS are  
 251 listed in Table 2.

252 **Table 2 – Network settings for this feature set**

Parameter Name	Setting		Comments
<i>nwkTransactionPersistenceTime</i>	0x01f4	ZigBee PRO MM	Note that this value essentially “covers” the MAC attribute of the same name.  Note also that, while [R1] implies that this quantity has meaning only in beacon-enabled networks, it may actually be used in beaconless networks as well and, in that case, is a multiplier for <i>aBaseSuperframeDuration</i> . The value here yields a persistence time of 7.68 seconds using the 2.4Ghz symbol rate from [R9] in a non-beaconed network.
		ZigBee-PRO	
<i>nwkReportConstantCost</i>	FALSE	ZigBee PRO MM	The NWK layer in PRO shall always calculate routing cost on the basis of neighbor link cost and never report constant cost.
		ZigBee-PRO	

### 253 6.3 Application settings

254 The application settings for the ZigBee and ZigBee-PRO feature sets are, for the most part, described in  
 255 the restricted PICS captured in Section 10.6. Those setting not covered by the PICS are listed in Table 3.

256 **Table 3 – Application settings for this feature set**

Parameter Name	Setting		Comments
Number of active endpoints per sleeping ZigBee end device (maximum)	-	ZigBee PRO MM	As the responsibility to arrange for caching of service discovery information lies with the end device itself, this parameter is not restricted.
		ZigBee-PRO	

Parameter Name	Setting	Comments	
Config_NWK_Leave_removeChildren	FALSE	ZigBee PRO MM	
		ZigBee-PRO	

257 **6.4 Security settings**

258 The security settings for the ZigBee and ZigBee-PRO feature sets are listed in Table 4.

259 **Table 4 – Security settings for this feature set**

Parameter Name	Setting	Comments	
apsSecurityTimeoutPeriod	TxDuration <sup>1</sup> * (2*NWK Maximum Depth) + (AES Encrypt/Decrypt times)	ZigBee PRO MM	<p>Where AES Encrypt/Decrypt times = 200ms, and</p> <p>Where NWK Maximum Depth is assumed to be 5, meaning every device in the network can be reached in not more than 10 hops , and</p> <p>Where TxDuration is assumed to be 1562.5 octetDurations (50 msec on 2.4GHz), meaning maximum duration of transmitting a packet by a hop, i.e. 700 milliseconds on 2.4 GHz. Note that this timeout assumes worst case AES engine speeds and is not indicative of expected performance for most devices.</p>
		ZigBee-PRO	<p>Where AES Encrypt/Decrypt times = 200ms, and</p> <p>Where NWK Maximum Depth is assumed to be 15, meaning every device in the network can be reached in not more than 30 hops, and</p> <p>Where TxDuration is assumed to be 1562.5 octetDurations (50 msec on 2.4GHz), meaning maximum duration of transmitting a packet by a hop, i.e. 1.7 seconds on 2.4 GHz. Note that this timeout assumes worst case AES engine speeds and is not indicative of expected performance for most devices.</p>

260

<sup>1</sup> CCB 1623

## 261 7 Functional description

262 For the most part, the functioning of ZigBee **PRO MM** and ZigBee-PRO with respect to the NWK layer,  
263 the APS layer and the ZDO is described in [R1]. However, the configuration details and operational  
264 requirements for devices operating under the ZigBee **PRO MM** and ZigBee-PRO feature sets lead to  
265 some special functional considerations, which are detailed here.

### 266 7.1 Device roles

267 The basic roles performed by ZigBee devices in ZigBee **PRO MM** and ZigBee-PRO networks are  
268 determined by their device type:

- 269 • The **ZigBee PRO and PRO MM coordinator** initiates network formation, choosing the  
270 network channel, PAN ID and extended PAN ID in the process, and thereafter should act as a  
271 ZigBee router. It may also perform the roles of trust center and Network Channel Manager.  
272 With respect to binding, the ZigBee coordinator is expected to handle end device bind request  
273 on behalf of all end devices in the network but is not expected to be a global binding repository  
274 for the network.
- 275 • **All ZigBee routers** are called upon to relay traffic on behalf of other devices in the network  
276 and, in particular, are required to act as routing agents on behalf of their end device children,  
277 which will typically not have the neighbor tables, routing tables, route discovery tables or  
278 broadcast transaction tables required to perform routing. Since end devices may sleep, ZigBee  
279 routers and ZigBee coordinators in their role of ZigBee routers may cache discovery information  
280 on behalf of their sleeping end-device children. A ZigBee router may perform the role of trust  
281 center and Network Channel Manager.
- 282 • **All ZigBee end devices** are joined to and managed by ZigBee routers or the ZigBee coordinator.  
283 Because ZigBee-PRO networks are beaconless, there is no built-in synchronization mechanism  
284 between sleeping end devices and their router parents. End devices are free to set their own duty  
285 cycles within the broad polling limits defined by this feature set. End devices that wish to have  
286 their discovery information cached by their parent or some other device are responsible for using  
287 the discovery cache commands to achieve this.

288 Under the ZigBee and ZigBee-PRO feature sets, all devices are expected to manage their own binding  
289 tables if they use binding tables.

290 This section is valid for both the **ZigBee PRO MM** and **ZigBee PRO** feature sets. In R22 release only  
291 one ZigBee MB coordinator is supported per HAN network and no ZigBee MB or sub GHz routers are  
292 supported to simplify deployment for GB market.

293

### 294 7.2 ZigBee: Compatibility with Other Feature sets

295 Devices implementing the ZigBee feature set will advertise a feature set identifier of 1 in their beacon  
296 payloads as stated below in the additional restrictions for PICS item NLF4. In general, such devices will  
297 seek out and join networks in which the ZigBee coordinator (Centralized network) and all ZigBee routers  
298 implement the ZigBee feature set and advertise this fact by placing a feature set identifier of 1 in their  
299 beacon payloads.

300 In ZigBee 3.0 ZigBee End Devices (eg. Light, etc..) and ZigBee Router Devices (eg Light switch, etc..) can form multiple distributed networks without a ZigBee coordinator in the network using distributed security. (CCB 2178)

303 In order to provide compatibility with devices implemented according to the ZigBee-PRO feature set,  
304 ZigBee devices shall additionally be able to join networks which advertise a feature set identifier of 2 in  
305 their beacon payloads but the device must join the ZigBee-PRO networks as end devices and only those  
306 ZigBee-PRO networks employing standard network security.

307 This section is valid for the **ZigBee PRO MM and ZigBee PRO** feature set.



### 308 **7.3 ZigBee-PRO: Feature set**

### 309 **7.4 Binding tables**

310 Binding tables, if used, shall be located on the source device. While binding is optional, devices that  
311 choose to use binding tables should allocate enough binding table entries to handle their own  
312 communications needs. This suggests that binding table size should be flexible enough that it can be set,  
313 at least at compile time, with some awareness of the actual intended usage of the device.

314 This section is valid for both the **ZigBee PRO MM** and **ZigBee-PRO** feature sets.

### 315 **7.5 Multicast mechanism and groups**

316 Support for APS level multicasts is mandatory to support compatibility with ZigBee devices. The  
317 multicast groups are then established using the application level mechanisms. Support for routing of  
318 network level multicasts is mandatory in the ZigBee-PRO feature set.

319 ZigBee devices do not support network level multicasts.

### 320 **7.6 Trust Center Policies and Security Settings**

321 A ZigBee PRO network shall have a trust center uniquely pointed to by each device in the network  
322 through `apsTrustCenterAddress` within each network member device. It is beyond the scope of the PRO  
323 Feature set to describe how this value is set or whether it is changed and the Trust Center relocated to  
324 another device during operation. The only requirement of the PRO Feature set is that all devices in the  
325 network point to the one unique Trust Center and that the device pointed to as the Trust Center supplies  
326 the security services described by this document.

327 The trust center dictates the security parameters of the network, such as which network key type to use,  
328 settings of the service permissions table, when, if at all, to allow devices to use unsecured association to  
329 the network, and when, if at all, to allow an application master or link key to be set up between two  
330 devices. For interoperability, there are two distinct security settings that can be used within the ZigBee  
331 PRO feature set – a standard and a high security.

332 Networks can exist for periods without a trust center. There are some operations where it is necessary  
333 for the trust center to be operational in the network. These include initial network setup, key changes,  
334 and when joining and rejoining devices require updated keys.

335 A wide range of implementations are possible, depending on the requirements of the application. A high  
336 security trust center may allow the user to install devices “out-of-band”, keep separate link keys for  
337 different devices, optionally ignore `Mgmt_Permit_Joining_req` commands from other nodes, and  
338 configure application trust policies between devices or groups of devices, etc. A standard security trust  
339 center would not offer these advantages, but would not be required to carry the associated costs.

### 340 **7.7 Battery powered devices**

341 ZigBee-PRO networks may, of course, contain battery-powered devices. ZigBee routers are required to  
342 have their receivers enabled whenever they are not transmitting.

343 As mentioned above, ZigBee-PRO networks are beaconless networks and, in the absence of an explicit  
344 mechanism for synchronization and indirect transmission, sleeping devices must set their own duty  
345 cycles and use polling, under ZDO control, if they expect to receive frames that are directed to them  
346 when they are asleep. The feature set provides that parent devices, i.e. ZigBee routers and the ZigBee  
347 coordinator, hold frames for  $0x01F4$  symbols<sup>2</sup> (7.68 seconds on 2.4 GHz) on behalf of sleeping end  
348 devices and this is also, roughly speaking, the maximum polling rate prescribed here. Devices may  
349 implement a polling interval longer than  $0x01F4$  symbols<sup>3</sup>, however the application will then have to  
350 handle the potential loss of messages during longer sleep cycles.

---

<sup>2</sup> CCB 1624

<sup>3</sup> CCB 1624

## 351 **7.8 Mains powered devices**

352 It is assumed that for most ZigBee-PRO networks, the ZigBee coordinator and ZigBee routers will be  
353 mains-powered and always on in order to properly perform their required roles with respect to the  
354 operation of the network.

## 355 **7.9 Persistent storage**

356 The ZigBee-PRO feature set does not support devices without persistent storage. Devices have  
357 information required to be saved between unintentional restarts and power failures. See [R1] sections  
358 2.2.8.1 and 3.6.8 for details of persistent data in the application and NWK layers. Various security  
359 material shall additionally be stored across power failures. All attributes in sections 4.3.3 and 4.4.10  
360 shall be stored, except that it is not mandatory to store those values which can safely be recovered using  
361 other stored information, or other methods.

## 362 **7.10 Address Reuse**

363 Re-use of previously assigned network short addresses in ZigBee-PRO devices is permitted subject to  
364 execution of the address conflict procedure by the device on the re-used address.

## 365 **7.11 Duty cycle limitations and fragmentation**

366 No mandatory restrictions on 2.4 GHz are defined for intermittent, low channel usage data, although  
367 developers are encouraged to minimise bandwidth usage wherever possible.

368 Large acknowledged unicast transmissions should generally use the APS fragmentation mechanism,  
369 where supported, as this handles retransmissions, duplicate rejection, flow control and congestion control  
370 automatically. Use of the fragmentation mechanism is as specified in the application profile documents.

371 Sub GHz UK deployment limits Regulatory Duty Cycle to 2.5% when CSMA LBT is used.

### 372 **7.11.1 Vulnerability join**

373 Vulnerability join shall be optional for networked devices, but support for it shall be mandatory for trust  
374 centers. The default for networks is permit joining is off. Permit joining is allowed for established time  
375 periods based on application requirements and specific instructions based on the system design.

376 Devices that join but do not successfully acquire and use the relevant security keys within the specified  
377 security timeout period shall disassociate themselves from the network, and their short address may be  
378 reused.

### 379 **7.11.2 Pre-installation**

380 Pre-installation is acceptable. Pre-installed devices are not exempt from the other requirements in this  
381 document. For example, a device certified as a trust center for this feature set shall support vulnerability  
382 installation of new devices, even if it is initially pre-installed.

## 383 **7.12 Security**

384 This feature set is designed to allow the efficient deployment of low cost devices, while also supporting  
385 the security requirements of highly sensitive applications. Installation and network maintenance  
386 procedures and administration are defined with the goal of satisfying the requirements of a range of  
387 applications within a single network infrastructure.

388 To achieve this, two security modes are specified: Standard mode and High Security mode. By default  
389 all applications will use the network key for communications. However, where confidentiality from  
390 other network nodes is required an application shall be permitted to use application link keys. Where  
391 link keys are required by specific application profiles, commands not secured with a link key shall be  
392 processed according to the rules established by the application profile.

393 The trust center plays a key role in determining the security settings in use in the network, and can  
394 optionally be implemented to apply further restrictions on the network.

395 It is recommended that the trust center change the network key if it is discovered that any device has  
396 been stolen or otherwise compromised, and in order to avoid deadlock if all frame counter records  
397 become filled up. It is an application responsibility within the Trust Center to effect the change to the  
398 network key. There is no expectation that the network key be changed when adding a new device.

399 All devices may implement a service permissions table, which they may use to determine which devices  
400 are authorized to issue which commands. Unauthorized commands should not be carried out.

401 The trust center should be implemented to make appropriate choices about when to initiate an application  
402 master/link key shared between two devices. Where restrictions between devices are required it is the  
403 responsibility of the system installer/administrator to deploy a suitably intelligent trust center and  
404 configure it to make relevant checks before initiating sharing of application link keys between two  
405 devices. For example, it might facilitate policies based on certain times, certain manufacturers or device  
406 types, or when the trust center is configured in a certain way, etc. By default a simple trust center should  
407 always allow requests for link keys.

408 Devices may perform the relevant in or out of band authentication or key exchange before acquiring or  
409 using a link key with a new target.

#### 410 **7.12.1 Security Modes within PRO Networks**

411 The feature set shall use two security modes: Standard mode and High Security mode.

412 With the Standard mode, network keys and application link keys are permitted for all devices. The  
413 network key type shall be the “standard” network key. It shall not be required that devices perform entity  
414 authentication with their parent on joining nor shall it be required to perform entity authentication  
415 between neighbors. If end devices wish to have a trust center link key, this should be requested using the  
416 request key command. Note that it is optional for the trust center to support link keys.

417 With the High Security mode, all three key types are permitted and shall be supported by all devices. The  
418 network key type shall be the “high security” network key. It shall be required that devices shall perform  
419 entity authentication with their parent on joining and it shall be required to perform entity authentication  
420 between neighbors. Frames from devices not in the neighbour table shall not be accepted.

421 When a “standard” type network key is in use, devices shall be permitted to update the network key when  
422 requested to do so by a command appropriately secured with the current network key. When a “high  
423 security” type of network key is in use this shall not be permitted. Additionally, in “high security”, new  
424 trust center link keys may be deployed by SKKE only, i.e.: they shall not be sent using key transport.

425 Bit 6 of the capabilities field (security bit) shall be used to indicate whether or not a joining (or re-joining)  
426 device supports High Security mode. It shall be set to 0 if the joining or re-joining device does not  
427 support High Security mode (i.e. supports Standard mode), and shall be set to 1 if it does support High  
428 Security mode. The trust center may optionally make use of this information as part of its policy settings,  
429 for example when determining whether or not to allow the device onto the network, or when determining  
430 whether to initiate SKKE with a new joiner or send a link key and/or network key in the clear to the new  
431 device.

432 The above specifications are as currently described in the ZigBee specification. Standard mode and High  
433 Security mode allow implementation of two different strengths of security depending on the application  
434 requirements and the specification supports a device indicating its security capabilities as it joins the  
435 network, thus giving the Trust Center the means to be able to accept or reject the device based on its  
436 policy.

437

## 438 **8 Instructions for completing the PICS proforma**

439

440 *If a given implementation is claimed to conform to this standard, the actual PICS proforma to be filled in by a supplier shall be*  
441 *technically equivalent to the text of the PICS proforma in this document, and shall preserve the numbering and naming and the*  
442 *ordering of the PICS proforma.*

443

444 A PICS which conforms to this document shall be a conforming PICS proforma completed in  
445 accordance with the instructions for completion given in this section.

446

447 The main part of the PICS is a fixed-format questionnaire, divided. Answers to the questionnaire are to  
448 be provided in the rightmost column, either by simply marking an answer to indicate a restricted choice  
449 (such as Yes or No), or by entering a value, set, or range of values.

Rev 1.0 release

## 9 Identification of the implementation

450  
451  
452  
453  
454  
455  
456  
457  
458  
459  
460  
461  
462  
463  
464  
465  
466  
467  
468  
469  
470  
471  
472  
473  
474  
475  
476  
477  
478  
479  
480  
481  
482  
483  
484  
485  
486  
487  
488  
489  
490  
491

### System under test (SUT) identification

SUT name: **NXP JN516x ZBPro R22**

Software Version : **86721/87542**

Hardware Version: **1.0**

Operating system (optional): **N/A**

### Specification Version Numbers at time of certification

ZigBee PRO Specification Revision: **05-3474-22**

Approved Errata Text to the ZigBee PRO Specification (if any): **N/A**

ZigBee PRO Test Plan Revision: **15-0030-08**

Approved Errata Text to the ZigBee PRO Test Plan (if any): **N/A**

### Product supplier Contact Information

Company Name: **NXP Semiconductors Netherlands B.V.**

Contact Name: **Simon Wadsworth**


Address: **5<sup>th</sup> Floor, Synergy Building, Hartshead, Sheffield, S1 2EL, United Kingdom**

Telephone number: **+44 (0) 114 2812655**

Facsimile number: **+44 (0) 114 2812951**

Email address: **simon.wadsworth@nxp.com**

Additional information: **None**

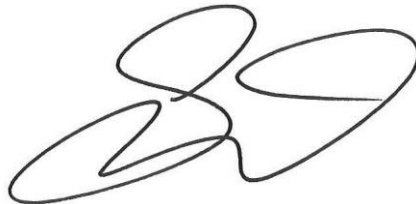

492  
493  
494

Signature \_\_\_\_\_

## 10 Protocol implementation conformance statement (PICS) proforma

### 10.1 Abbreviations and special symbols

Notations for requirement status:

M	Mandatory
O	Optional
O.n	Optional, but support of at least one of the group of options labeled O.n is required.
N/A	Not applicable
X	Prohibited

“item”: Conditional, status dependent upon the support marked for the “item”.

For example, if FDT1 and FDT2 are both marked “O.1” this indicates that the status is optional but at least one of the features described in FDT1 and FDT2 is required to be implemented, if this implementation is to follow the standard of which this PICS Proforma is a part.

In below table if a Multi-MAC (MM) device list bands supports, if supported concurrently with 2.4 GHz, and maximum Power level supported in each band.

### 10.2 ZigBee device types

Item number	Item description	Reference	ZigBee Status	Feature set Support	Additional Constraints	Platform Support	
FDT1	Is this device capable of acting as a ZigBee coordinator?	[R1]/Preface (Definitions)		ZigBee PRO MM	O.1		X
				ZigBee-PRO	O.1		X
FDT2	Is this device capable of acting as a ZigBee router?  Note: Great Britain not supporting sub GHz router in R22 but can be deployed in other European markets.	[R1]/Preface (Definitions)		ZigBee PRO MM	O.1		X
				ZigBee-PRO	O.1		X
FDT3	Is this a ZigBee end device?	[R1]/Preface (Definitions)		ZigBee PRO MM	O.1		X
				ZigBee-PRO	O.1		X

507

508 **10.3 IEEE 802.15.4 PICS**509 **10.3.1 FDT2 and FDT3 network join options**

Item number	Item description	Reference	ZigBee Status	Feature set Support	Additional Constraints	Platform Support
JN1	The device joins a network by scanning and then associating (client)	[R9] 7.3.1.1	FDT1:X FDT2:O FDT3:O	ZigBee PRO MM	FDT1: X FDT2: M FDT3: M	X
				ZigBee-PRO	FDT1: X FDT2: M FDT3: M	X
JN10	The device supports joining a network by associating (server)	[R9] 7.3.1.1	FDT1: O FDT2: O FDT3: N/A	ZigBee PRO MM	FDT1: M FDT2: M FDT3: X	X
				ZigBee-PRO	FDT1: M FDT2: M FDT3: X	X
JN2	The device joins a network by using an orphan scan (client)	[R9] 7.3.2.3	FDT1: N/A FDT2: O FDT3: O	ZigBee PRO MM	FDT1: X FDT2: O FDT3: O	X
				ZigBee-PRO	FDT1: X FDT2: O FDT3: O	X
JN20	The device supports joining a network by using an orphan scan (server)	[R9] 7.3.2.3	FDT1: O FDT2: O FDT3: N/A	ZigBee PRO MM	FDT1: M FDT2: M FDT3: X	X
				ZigBee-PRO	FDT1: M FDT2: M FDT3: X	X

510

511 **10.3.2 IEEE 802.15.4 PHY**512 **10.3.2.1 Radio frequency of operation**

Item number	Item description	Reference	ZigBee Status	Feature set Support		Additional Constraints	Platform Support
RF1	The device operates at Sub GHz GB/OFCOM – Page 28 to 31 and defined channels	[R9] 6.1.1, 6.1.2, 6.6	O <sup>3</sup>	ZigBee PRO MM	O <sup>3</sup>		X
				ZigBee-PRO	O <sup>3</sup>		X
RF2	The device operates at a frequency of 2.4 GHz.	[R9] 6.1.1, 6.1.2, 6.5	O <sup>3</sup>	ZigBee PRO MM	O <sup>3</sup>		X
				ZigBee-PRO	O <sup>3</sup>		X

513 O<sup>3</sup>: at least one option must be selected.

514

515 **10.3.2.2 Clear channel assessment**

Item number	Item description	Reference	ZigBee Status	Feature set Support		Additional Constraints	Platform Support
CCA1	Mode 1: Energy above threshold is supported.	[R9] 6.7.9	O <sup>4</sup>	ZigBee PRO MM	O <sup>4</sup>		X
				ZigBee-PRO	O <sup>4</sup>		X
CCA2	Mode 2: Carrier sense only is supported.	[R9] 6.7.9	O <sup>4</sup>	ZigBee PRO MM	O <sup>4</sup>		X
				ZigBee-PRO	O <sup>4</sup>		X



Item number	Item description	Reference	ZigBee Status	Feature set Support		Additional Constraints	Platform Support
				ZigBee PRO MM			
CCA3	Mode 3: Carrier sense with energy above threshold is supported.	[R9] 6.7.9	O <sup>4</sup>	ZigBee PRO MM	O <sup>4</sup>		X
				ZigBee-PRO	O <sup>4</sup>		X

516 O<sup>4</sup>: at least one option must be selected.

517

### 518 10.3.3 IEEE 802.15.4 MAC

#### 519 10.3.3.1 Channel access

Item number	Item description	Reference	ZigBee Status	Feature set Support		Additional Constraints	Platform Support
				ZigBee PRO MM			
CA1	A super-frame structure is supported.	[R9] 7.5.1.1	O	ZigBee PRO MM	X		Click here to enter text.
				ZigBee-PRO	X		Click here to enter text.
CA2	Un-slotted CSMA-CA is supported.	[R9] 7.5.1.1	M	ZigBee PRO MM	M	All devices shall set their MIB values as follows: <i>macBeaconOrder</i> = 0x0f, <i>macSuperframeOrder</i> = 0x0f.	X
				ZigBee-PRO	M		All devices shall set their MIB values as follows: <i>macBeaconOrder</i> = 0x0f, <i>macSuperframeOrder</i> = 0x0f.
CA3	Slotted CSMA-CA is supported.	[R9] 7.5.1.1	CA1: M	ZigBee PRO MM	X		Click here to enter text.
				ZigBee-PRO	X		Click here to enter text.

Item number	Item description	Reference	ZigBee Status	Feature set Support		Additional Constraints	Platform Support
CA4	Super-frame timing is supported.	[R9] 7.5.1.1	CA1: M	ZigBee PRO MM	X		Click here to enter text.
				ZigBee-PRO	X		Click here to enter text.

520

521 **10.3.3.2 Guaranteed time slots**

Item number	Item description	Reference	ZigBee Status	Feature set Support		Additional Constraints	Platform Support
GTS1	Guaranteed time slots are supported ( <i>server</i> ).	[R9] 7.5.7	FDT1: O	ZigBee PRO MM	X		Click here to enter text.
				ZigBee-PRO	X		Click here to enter text.
GTS2	Guaranteed time slots are supported ( <i>client</i> ).	[R9] 7.5.7	FDT2: O FDT3: O	ZigBee PRO MM	X		Click here to enter text.
				ZigBee-PRO	X		Click here to enter text.
GTS3	The client device has the ability to request a GTS. Operations include: <ul style="list-style-type: none"> <li>• Allocation requests</li> <li>• De-allocation requests</li> <li>• [MLME-GTS.request primitive]</li> <li>• [MLME-GTS.confirm primitive]</li> <li>• Transmission of the GTS request command.</li> </ul>	[R9] 7.1.7.1, 7.1.7.2, 7.3.3.1, 7.5.7.2, 7.5.7.4	GTS2: M	ZigBee PRO MM	X		Click here to enter text.
				ZigBee-PRO	X		Click here to enter text.

Item number	Item description	Reference	ZigBee Status	Feature set Support		Additional Constraints	Platform Support
GTS4	The server has the ability to process GTS requests. Operations include: <ul style="list-style-type: none"> <li>• Allocation requests</li> <li>• De-allocation requests</li> <li>• Re-allocation requests</li> <li>• [MLME-GTS.indication primitive]</li> <li>• Reception and processing of the GTS request command.</li> </ul>	[R9] 7.1.7.3, 7.3.3.1, 7.5.7.2, 7.5.7.4, 7.5.7.5	GTS1: M	ZigBee PRO MM	X		Click here to enter text.
				ZigBee-PRO	X		Click here to enter text.
GTS5	The server can manage the GTSs.	[R9] 7.5.7	GTS1: M	ZigBee PRO MM	X		Click here to enter text.
				ZigBee-PRO	X		Click here to enter text.
GTS6	The server can perform CAP maintenance.	[R9] 7.5.7.1	GTS1: M	ZigBee PRO MM	X		Click here to enter text.
				ZigBee-PRO	X		Click here to enter text.
GTS7	The device can transmit and/or receive data within a GTS.	[R9] 7.5.7.3	GTS1: M GTS2: M	ZigBee PRO MM	X		Click here to enter text.
				ZigBee-PRO	X		Click here to enter text.

523 **10.3.3.3 Scanning**

Item number	Item description	Reference	ZigBee Status	Feature set Support		Additional Constraints	Platform Support
S1	The device can perform some form of channel scan. Operations include: <ul style="list-style-type: none"> <li>Scanning mechanism</li> <li>[MLME-SCAN.request primitive]</li> <li>[MLME-SCAN.confirm primitive]</li> </ul>	[R9] 7.1.11.1, 7.1.11.2, 7.5.2.1	M	ZigBee PRO MM	M	All devices shall be able to perform at least an active scan.	X
				ZigBee-PRO	M	All devices shall be able to perform at least an active scan.	X
S2	The device can perform an energy detection scan.	[R9] 7.5.2.1.1	FDT1: M	ZigBee PRO MM	FDT1: M FDT2: M FDT3: X	Network devices shall perform an energy detection scan on request from the next higher layer.	X
				ZigBee-PRO	FDT1: M FDT2: M FDT3: X	The coordinator shall perform an energy detection scan on each available channel in the active channel mask before starting a network.	X
S3	The device can perform an active scan. Operations include: <ul style="list-style-type: none"> <li>Transmission of the beacon request command.</li> </ul>	[R9] 7.3.2.4, 7.5.2.1.2	FDT1: M JN1: M	ZigBee PRO MM	M	All devices shall perform an active scan on each available channel in the active channel mask.	X
				ZigBee-PRO	M	All devices shall perform an active scan on each available channel in the active channel mask.	X
S4	The device can perform a passive scan.	[R9] 7.5.2.1.3	O	ZigBee PRO MM	X		Click here to enter text.
				ZigBee-PRO	X		Click here to enter text.

Item number	Item description	Reference	ZigBee Status	Feature set Support		Additional Constraints	Platform Support
				ZigBee PRO MM	ZigBee PRO		
S5	The client can perform an orphan scan. Operations include: <ul style="list-style-type: none"> <li>Orphan device realignment.</li> <li>Transmission of the orphan notify command.</li> <li>Reception and processing of the coordinator realignment command.</li> </ul>	[R9] 7.3.2.3, 7.3.2.5, 7.5.2.1.4	JN2: M	ZigBee PRO MM	JN2:M		X
				ZigBee-PRO	JN2:M		X
S6	The server can perform orphan scan processing. Operations include: <ul style="list-style-type: none"> <li>[MLME-ORPHAN.indicate primitive]</li> <li>[MLME-ORPHAN.response primitive]</li> <li>Reception and processing of the orphan notify command.</li> <li>Transmission of the coordinator realignment command.</li> </ul>	[R9] 7.1.8.1, 7.1.8.2, 7.3.2.3, 7.3.2.5, 7.5.2.1.4	FDT1: O FDT2: O	ZigBee PRO MM	FDT1: M FDT2: M FDT3: X	Network rejoin is the preferred mechanism for devices to use, however, orphan scan may be used and the parent devices shall support orphan scan.	X
				ZigBee-PRO	FDT1: M FDT2: M FDT3: X	Network rejoin is the preferred mechanism for devices to use, however, orphan scan may be used and the parent devices shall support orphan scan.	X
S7	The server can receive and process a beacon request command.	[R9] 7.3.2.4	S3 & FDT1: M	ZigBee PRO MM	FDT1: M FDT2: M FDT3: X		X
				ZigBee-PRO	FDT1: M FDT2: M FDT3: X		X

525 **10.3.3.4 PAN identifier conflict resolution**

Item number	Item description	Reference	ZigBee Status	Feature set Support		Additional Constraints	Platform Support
PICR1	PAN identifier conflict resolution is supported ( <i>server</i> ). Operations include: <ul style="list-style-type: none"> <li>Reception and processing of the PAN identifier conflict notification command.</li> <li>Transmission of the coordinator realignment command.</li> </ul>	[R9] 7.3.2.2, 7.3.2.5, 7.5.2.2	FDT1: O	ZigBee PRO MM	FDT1: X FDT2: X FDT3: X		Click here to enter text.
				ZigBee-PRO	FDT1: X FDT2: X FDT3: X		Click here to enter text.
PICR2	PAN identifier conflict resolution is supported ( <i>client</i> ). Operations include: <ul style="list-style-type: none"> <li>Transmission of the PAN identifier conflict notification command.</li> <li>Reception and processing of the coordinator realignment command.</li> </ul>	[R9] 7.3.2.2, 7.3.2.5, 7.5.2.2	FDT2: O FDT3: O	ZigBee PRO MM	FDT1: X FDT2: X FDT3: X		Click here to enter text.
				ZigBee-PRO	FDT1: X FDT2: X FDT3: X		Click here to enter text.

526

527 **10.3.3.5 PAN start**

Item number	Item description	Reference	ZigBee Status	Feature set Support		Additional Constraints	Platform Support
PS1	Starting a PAN is supported. Operations include: <ul style="list-style-type: none"> <li>[MLME-START.request primitive]</li> <li>[MLME-START.confirm primitive]</li> </ul>	[R9] 7.1.14.1, 7.1.14.2, 7.5.2.3	FDT1: M FDT2: M FDT3: O	ZigBee PRO MM	FDT1: M FDT2: M FDT3: X		X
				ZigBee-PRO	FDT1: M FDT2: M FDT3: X		X

528

529 **10.3.3.6 Association**

Item number	Item description	Reference	ZigBee Status	Feature set Support		Additional Constraints	Platform Support
A1	Association is supported ( <i>server</i> ).	[R9] 7.5.3.1	FDT1: O FDT2: O	ZigBee PRO MM	FDT1: M FDT2: M FDT3: X		X
				ZigBee-PRO	FDT1: M FDT2: M FDT3: X		X
A2	Association is supported ( <i>client</i> ).	[R9] 7.5.3.1	FDT2: O FDT3: O	ZigBee PRO MM	FDT1: X FDT2: M FDT3: M		X
				ZigBee-PRO	FDT1: X FDT2: M FDT3: M		X
A3	The server can process association requests. Operations include: <ul style="list-style-type: none"> <li>• [MLME-ASSOCIATE.in dicate primitive]</li> <li>• [MLME-ASSOCIATE.re sponse primitive]</li> <li>• Reception and processing of the association request command.</li> <li>• Transmission of the association response command.</li> </ul>	[R9] 7.1.3.2, 7.1.3.3, 7.3.1.1, 7.3.1.2	A1: M	ZigBee PRO MM	FDT1: M FDT2: M FDT3: X		X
				ZigBee-PRO	FDT1: M FDT2: M FDT3: X		X

Item number	Item description	Reference	ZigBee Status	Feature set Support		Additional Constraints	Platform Support
A4	The client can perform association. Operations include: <ul style="list-style-type: none"> <li>• [MLME-ASSOCIATE.request primitive]</li> <li>• [MLME-ASSOCIATE.confirm primitive]</li> <li>• Transmission of the association request command.</li> <li>• Reception and processing of the association response command.</li> </ul>	[R9] 7.1.3.1, 7.1.3.4, 7.3.1.1, 7.3.1.2	A2: M	ZigBee PRO MM	FDT1: X FDT2: M FDT3: M		X
				ZigBee-PRO	FDT1: X FDT2: M FDT3: M		X

530

531 **10.3.3.7 Disassociation**

Item number	Item description	Reference	ZigBee Status	Feature set Support		Additional Constraints	Platform Support
D1	The device can request a disassociation. Operations include: <ul style="list-style-type: none"> <li>• [MLME-DISASSOCIATE.request primitive]</li> <li>• [MLME-DISASSOCIATE.confirm primitive]</li> <li>• Transmission of the disassociation notify command.</li> </ul>	[R9] 7.1.4.1, 7.1.4.3, 7.3.1.3	O	ZigBee PRO MM	FDT1: X FDT2: X FDT3: X		Click here to enter text.
				ZigBee-PRO	FDT1: X FDT2: X FDT3: X		Click here to enter text.



Item number	Item description	Reference	ZigBee Status	Feature set Support		Additional Constraints	Platform Support
D2	The client can react to a disassociation from the server. Operations include: <ul style="list-style-type: none"> <li>• [MLME-DISASSOCIATE.indicate primitive]</li> <li>• Reception and processing of the disassociation notify command.</li> </ul>	[R9] 7.1.4.2, 7.3.1.3	O	ZigBee PRO MM	FDT1: X FDT2: X FDT3: X		Click here to enter text.
				ZigBee-PRO	FDT1: X FDT2: X FDT3: X		Click here to enter text.
D3	The server can react to a disassociation from a client device. Operations include: <ul style="list-style-type: none"> <li>• [MLME-DISASSOCIATE.indicate primitive]</li> <li>• Reception and processing of the disassociation notify command.</li> </ul>	[R9] 7.1.4.2, 7.3.1.3	O	ZigBee PRO MM	FDT1: X FDT2: X FDT3: X		Click here to enter text.
				ZigBee-PRO	FDT1: X FDT2: X FDT3: X		Click here to enter text.

532

533 **10.3.3.8 Beacon synchronization**

Item number	Item description	Reference	ZigBee Status	Feature set Support		Additional Constraints	Platform Support
BS1	Beacon notification is supported. Operations include: <ul style="list-style-type: none"> <li>• [MLME-BEACON-NOTIFY.indication primitive]</li> </ul>	[R9] 7.1.5.1	O	ZigBee PRO MM	FDT1: M FDT2: M FDT3: M		X
				ZigBee-PRO	FDT1: M FDT2: M FDT3: M		X

Item number	Item description	Reference	ZigBee Status	Feature set Support		Additional Constraints	Platform Support
BS2	The client can synchronize to a beacon. Operations include: <ul style="list-style-type: none"> <li>• (Tracking only for beacon networks)</li> <li>• [MLME-SYNC.request primitive]</li> <li>• [MLME-SYNC-LOSS.indication primitive]</li> </ul>	[R9] 7.1.15.1, 7.1.15.2, 7.5.4	O	ZigBee PRO MM	FDT1: X FDT2: X FDT3: X		Click here to enter text.
				ZigBee-PRO	FDT1: X FDT2: X FDT3: X		Click here to enter text.

534

535 **10.3.3.9 Transmission**

Item number	Item description	Reference	ZigBee Status	Feature set Support		Additional Constraints	Platform Support
T1	Frame transmission is supported. Operations include: <ul style="list-style-type: none"> <li>• Frame construction</li> <li>• [MCPS-DATA.request primitive]</li> <li>• [MCPS-DATA.confirm primitive]</li> <li>• Transmission of data frames.</li> </ul>	[R9] 7.1.1.1, 7.1.1.2, 7.2.1, 7.2.2.2, 7.5.6.1	M	ZigBee PRO MM	M		X
				ZigBee-PRO	M		X
T2	Implicit (command frame) transmission confirmation is supported. Operations include: <ul style="list-style-type: none"> <li>• [MLME-COMM-STATUS.indication primitive]</li> </ul>	[R9] 7.1.12.1	M	ZigBee PRO MM	M		X
				ZigBee-PRO	M		X

536

537 **10.3.3.10 Reception**

Item number	Item description	Reference	ZigBee Status	Feature set Support		Additional Constraints	Platform Support
R1	Frame reception is supported. Operations include: <ul style="list-style-type: none"> <li>Data frame deconstruction</li> <li>[MCPS-DATA.indication primitive]</li> <li>Reception of data frames.</li> </ul>	[R9] 7.1.1.3, 7.2.1, 7.2.2.2	M	ZigBee PRO MM	M		X
				ZigBee-PRO	M		X
R2	Receiver control is supported. Operations include: <ul style="list-style-type: none"> <li>[MLME-RX-ENABLE.request primitive]</li> <li>[MLME-RX-ENABLE.confirm primitive]</li> </ul>	[R9] 7.1.10.1, 7.1.10.2	O	ZigBee PRO MM	O		X
				ZigBee-PRO	O		X
R3	Filtering and rejection is supported.	[R9] 7.5.6.2	M	ZigBee PRO MM	M		X
				ZigBee-PRO	M		X
R4	Promiscuous mode is supported.	[R9] 7.5.6.6	O	ZigBee PRO MM	O		Click here to enter text.
				ZigBee-PRO	O		Click here to enter text.

538

## 539 10.3.3.11 Transaction handling

Item number	Item description	Reference	ZigBee Status	Feature set Support		Additional Constraints	Platform Support
TH1	Transaction handling is supported ( <i>server</i> ).	[R9] 7.5.5	FDT1: O FDT2: O	ZigBee PRO MM	FDT1: M FDT2: M FDT3: X	The server shall be able to handle at least one transaction.	X
				ZigBee-PRO	FDT1: M FDT2: M FDT3: X	The server shall be able to handle at least one transaction.	X
TH2	Transaction handling is supported ( <i>client</i> ).	[R9] 7.5.5	FDT2: O FDT3: O	ZigBee PRO MM	FDT1: X FDT2: X FDT3: M		X
				ZigBee-PRO	FDT1: X FDT2: X FDT3: M		X
TH3	The server can manage transactions to its devices. Operations include: <ul style="list-style-type: none"> <li>Transaction queuing</li> <li>Reception and processing of the data request command.</li> </ul>	[R9] 7.5.5, 7.1.1.4, 7.1.1.5, 7.3.2.1	TH1: M	ZigBee PRO MM	FDT1: M FDT2: M FDT3: X		X
				ZigBee-PRO	FDT1: M FDT2: M FDT3: X		X
TH30	The server can manage transaction purging operations: <ul style="list-style-type: none"> <li>[MCPS-PURGE.request primitive]</li> <li>[MCPS-PURGE.confirm primitive]</li> </ul>	[R9] 7.1.1.4, 7.1.1.5, 7.3.2.1	TH1: M	ZigBee PRO MM	O		Click here to enter text.
				ZigBee-PRO	O		Click here to enter text.
TH4	The client can extract data from the coordinator following an indication of data in a beacon.	[R9] 7.5.6.3	TH2: O <sup>5</sup>	ZigBee PRO MM	FDT1: X FDT2: X FDT3: X		Click here to enter text.
				ZigBee-PRO	FDT1: X FDT2: X FDT3: X		Click here to enter text.

Item number	Item description	Reference	ZigBee Status	Feature set Support		Additional Constraints	Platform Support
TH5	The client can poll for data. Operations include: <ul style="list-style-type: none"> <li>[MLME-POLL.request primitive]</li> <li>[MLME-POLL.confirm primitive]</li> <li>Transmission of the data request command.</li> </ul>	[R9] 7.1.16.1, 7.1.16.2, 7.3.2.1	TH2: O <sup>5</sup>	ZigBee PRO MM	FDT1: X FDT2: X FDT3: M		X
				ZigBee-PRO	FDT1: X FDT2: X FDT3: M		X

540 O<sup>5</sup>: At least one of these options must be supported.

#### 541 10.3.3.12 Acknowledgement service

Item number	Item description	Reference	ZigBee Status	Feature set Support		Additional Constraints	Platform Support
AS1	The acknowledgement service is supported.	[R9] 7.5.6.4	O	ZigBee PRO MM	M		X
				ZigBee-PRO	M		X
AS2	The device can transmit, receive and process acknowledgement frames.	[R9] 7.2.2.3	AS1: M	ZigBee PRO MM	M		X
				ZigBee-PRO	M		X
AS3	Deprecated	[R9] 7.5.6.4.2, 7.5.6.5	AS1: M	ZigBee PRO MM	X		Click here to enter text.
				ZigBee-PRO	X		Click here to enter text.

Item number	Item description	Reference	ZigBee Status	Feature set Support		Additional Constraints	Platform Support
AS4	Retransmissions are supported.	[R9] 7.5.6.5	AS1: M	ZigBee PRO MM	M		X
				ZigBee-PRO	M		X

542

543 **10.3.3.13 MIB management**

Item number	Item description	Reference	ZigBee Status	Feature set Support		Additional Constraints	Platform Support
MM1	MIB management is supported. Operations include: <ul style="list-style-type: none"> <li>MIB attribute storage</li> </ul>	[R9] 7.4.2	O	ZigBee PRO MM	M		X
				ZigBee-PRO	M		X
MM2	The device supports the reading of MIB attributes. Operations include: <ul style="list-style-type: none"> <li>[MLME-GET.request primitive]</li> <li>[MLME-GET.confirm primitive]</li> </ul>	[R9] 7.1.6.1, 7.1.6.2, 7.4.2	MM1: O	ZigBee PRO MM	M		X
				ZigBee-PRO	M		X
MM3	The device supports the writing of MIB attributes. Operations include: <ul style="list-style-type: none"> <li>MIB attribute verification</li> <li>[MLME-SET.request primitive]</li> <li>[MLME-SET.confirm primitive]</li> </ul>	[R9] 7.1.13.1, 7.1.13.2, 7.4.2	MM1: O	ZigBee PRO MM	M		X
				ZigBee-PRO	M		X

544

545 **10.3.3.14 MAC security**

Item number	Item description	Reference	ZigBee Status	Feature set Support		Additional Constraints	Platform Support
MS1	The device supports ACL mode. Operations include: <ul style="list-style-type: none"> <li>• ACL storage</li> <li>• ACL mode usage</li> </ul>	[R9] 7.4.2, 7.5.8.1, 7.5.8.3	O	ZigBee PRO MM	X		Click here to enter text.
				ZigBee-PRO	X		Click here to enter text.
MS2	The device supports secured mode.	[R9] 7.5.8.4	O	ZigBee PRO MM	X		Click here to enter text.
				ZigBee-PRO	X		Click here to enter text.

546

547

548 **10.3.3.15 Device reset**

Item number	Item description	Reference	ZigBee Status	Feature set Support		Additional Constraints	Platform Support
DR1	The device is able to reset. Operations include: <ul style="list-style-type: none"> <li>• [MLME-RESET.request primitive]</li> <li>• [MLME-RESET.confirm primitive]</li> </ul>	[R9] 7.1.9.1, 7.1.9.2	O	ZigBee PRO MM	O		X
				ZigBee-PRO	O		X

549

550 **10.4 Network layer PICS**551 **10.4.1 ZigBee network frame format**

Item number	Item description	Reference	ZigBee Status	Feature set Support		Additional Constraints	Platform Support
GFF1		[R1]/3.3.1		ZigBee PRO MM	M		X

Item number	Item description	Reference	ZigBee Status	Feature set Support		Additional Constraints	Platform Support
	Does the device support the general ZigBee network frame format?			ZigBee-PRO	M		X

552

553 **10.4.2 Major capabilities of the ZigBee network layer**

554 Tables in the following sub-clauses detail the capabilities of NWK layer for ZigBee devices.

555 **10.4.2.1 Network layer functions**

Item number	Item description	Reference	ZigBee Status	Feature set Support		Additional Constraints	Platform Support
NLF1	Does the network layer support transmission of data by the next higher layer?	[R1]/3.2.1.1, 3.2.1.2, 3.6.2.1	M	ZigBee PRO MM	M		X
				ZigBee-PRO	M		X
NLF2	Does the network layer support reception of data by the next higher layer?	[R1]/3.2.1.3, 3.6.2.2	M	ZigBee PRO MM	M		X
				ZigBee-PRO	M		X
NLF3	Does the network layer support discovery of existing ZigBee networks?	[R1]/3.2.2.1, 3.2.2.2	M	ZigBee PRO MM	M		X
				ZigBee-PRO	M		X



Item number	Item description	Reference	ZigBee Status	Feature set Support		Additional Constraints	Platform Support
NLF4	Does the network layer support formation of Distributed ZigBee networks? (CCB 2137)	[R1]/3.2.2.5,	O	ZigBee PRO MM / ZigBee PRO	FDT1: X FDT2: M FDT3: M	Devices using the ZigBee feature set shall set:  Feature set = 1 <i>nwkProtocolVersion</i> = 2  and shall advertise these values in their beacon payload in response to MAC beacon requests.  Devices using the ZigBee feature set shall also set:  <i>nwkSecurityLevel</i> = 1	X
	Does the network layer support formation of Centralized ZigBee networks?	[R1]/3.2.2.5,	O	ZigBee PRO MM / ZigBee PRO	FDT1: M FDT2: M FDT3: X	Devices using the ZigBee-PRO feature set shall set:  Feature set = 2 <i>nwkProtocolVersion</i> = 2  and shall advertise these values in their beacon payload in response to MAC beacon requests.  Devices using the ZigBee-PRO feature set shall also set:  <i>nwkSecurityLevel</i> = 5	X
NLF5	Can the network layer permit other devices to join the network of which it is a part (and also deny such permission)?	[R1]/3.2.2.5, 3.2.2.6, 3.6.1.2	FDT1:M, FDT2:M, FDT3:X	ZigBee PRO MM	FDT1: M FDT2: M FDT3: X		X
				ZigBee-PRO	FDT1: M FDT2: M FDT3: X		X
NLF6	Can the device start as a router?	[R1]/3.2.2.7, 3.2.2.8	FDT1:X, FDT2:M, FDT3:X	ZigBee PRO MM	FDT1: X FDT2: M FDT3: X		X
				ZigBee-PRO	FDT1: X FDT2: M FDT3: X		X
NLF60		[R1]/3.2.2.9, 3.2.2.10	M	ZigBee PRO MM	FDT1: M FDT2: M FDT3: X	NLME-ED-SCAN is mandatory for the coordinator and optional for all routers on a ZigBee network.	X

Item number	Item description	Reference	ZigBee Status	Feature set Support		Additional Constraints	Platform Support
	Can the network layer perform energy detection scans at the request of the next higher layer?			ZigBee-PRO	FDT1: M FDT2: M FDT3: X	NLME-ED-SCAN is mandatory for the coordinator and all routers on a PRO network.	X
NLF7	Can the device request membership in a ZigBee network?	[R1]/3.2.2.11, 3.2.2.13, 3.6.1.4	FDT1: N/A FDT2: M FDT3: M	ZigBee-PRO MM	FDT1: X FDT2: M FDT3: M		X
				ZigBee-PRO	FDT1: X FDT2: M FDT3: M		X
NLF70	Can the device request to join or rejoin a network using the end device timeout or MAC_PHY polling procedure? (CCB 2144)	[R1]/3.2.2.14, 3.2.2.15, 3.6.1.4.3.1	FDT1: N/A FDT2: O FDT3: O	ZigBee-PRO MM	FDT1: X FDT2: O FDT3: O		X
				ZigBee-PRO	FDT1: X FDT2: O FDT3: O		X
NLF71	Can the device request to join / rejoin a network using the rejoin command frame and associated procedure?	[R1]/3.2.2.11, 3.2.2.13, 3.6.1.4.2.1	FDT1: N/A FDT2: O FDT3: O	ZigBee-PRO MM	FDT1: X FDT2: M FDT3: M		X
				ZigBee-PRO	FDT1: X FDT2: M FDT3: M		X
NLF72	Can the network layer be directed by the next higher layer to change the operating channel of the network of which it is currently a part?	[R1]/3.2.2.11, 3.2.2.13	O	ZigBee-PRO MM	M	The network layer can be directed by the next higher layer to change the operating channel of the network of which it is currently part.	X
				ZigBee-PRO	M		X
NLF8	Can the device respond to requests to join the network of which it is a part?	[R1]/3.6.1.4.1.2, 3.6.1.4.2.2	FDT1: M FDT2: M FDT3: X	ZigBee-PRO MM	FDT1: M FDT2: M FDT3: X		X
				ZigBee-PRO	FDT1: M FDT2: M FDT3: X		X

Item number	Item description	Reference	ZigBee Status	Feature set Support		Additional Constraints	Platform Support
				ZigBee PRO MM	FDT1: M FDT2: M FDT3: X		
NLF81	Does the network layer of a device inform the next higher layer when a second device has joined or rejoined its network as a child?	[R1]/3.2.2.12	FDT1: M FDT2: M FDT3: X	ZigBee PRO MM	FDT1: M FDT2: M FDT3: X		X
				ZigBee-PRO	FDT1: M FDT2: M FDT3: X		X
NLF9	Does the network layer employ the Distributed Address Mechanism to generate a unique network address to assign to a joining device?	[R1]/3.6.1.6	FDT1: O FDT2: O FDT3: N/A	ZigBee PRO MM	FDT1: M FDT2: M FDT3: X	The ZigBee feature set always employs the distributed addressing scheme with:  <i>nwkMaxDepth</i> = 5 <i>nwkMaxChildren</i> = 20 <i>nwkMaxRouters</i> = 6	X
				ZigBee-PRO	FDT1: X FDT2: X FDT3: X		X
NLF90	Does the network layer employ the Stochastic Addressing Scheme to generate a unique network address to assign to a joining or rejoining device?	[R1]/3.6.1.7	FDT1: O FDT2: O FDT3: N/A	ZigBee PRO MM	FDT1: X FDT2: X FDT3: X		X
				ZigBee-PRO	FDT1: M FDT2: M FDT3: X		The ZigBee-PRO feature set employs stochastic address allocation.  The follow parameter values are defined:  <i>nwkAddrAlloc</i> = 2 <i>nwkUseTreeRouting</i> = FALSE <i>nwkMaxDepth</i> = 15  Note that <i>nwkMaxDepth</i> above is only used to compute timeouts and shall not limit the actual network radius, as this feature set does not use tree-based addressing.  The parameter <i>nwkMaxChildren</i> is not restricted in this feature set.
NLF100		Deprecated	X	ZigBee PRO MM	X		Click here to enter text.

Item number	Item description	Reference	ZigBee Status	Feature set Support		Additional Constraints	Platform Support
				ZigBee-PRO	PRO MM		
	Does the network layer employ the Higher Layer Address Assignment Mechanism to generate a unique network address to assign to a joining device?			ZigBee-PRO	X		Click here to enter text.
NLF10	Can the next higher layer request that a particular device be "pre-joined" to it using the DIRECT-JOIN procedure?	[R1]/3.2.2.14, 3.2.2.15, 3.6.1.4.3	FDT1: O FDT2: O FDT3: X	ZigBee-PRO MM	X	This service is useful for testing and may be allowed as a part of test procedures at the option of the stack developer.	X
				ZigBee-PRO	X	This service is useful for testing and may be allowed as a part of test procedures at the option of the stack developer.	X
NLF11	Can the device make a request to leave the network?	[R1]/3.2.2.16, 3.2.2.18, 3.6.1.10.1	O	ZigBee-PRO MM	FDT1: X FDT2: M FDT3: M		X
				ZigBee-PRO	FDT1: X FDT2: M FDT3: M		X
NLF12	Can the device make a request that one of its child devices leave the network?	[R1]/3.2.2.16, 3.2.2.18, 3.6.1.10.2	FDT1: O FDT2: O FDT3: N/A	ZigBee-PRO MM	FDT1: M FDT2: M FDT3: X		X
				ZigBee-PRO	FDT1: M FDT2: M FDT3: X		X
NLF13	Can the network layer process network leave commands from child devices?	[R1]/3.6.1.10.3	FDT1: M FDT2: M FDT3: N/A	ZigBee-PRO MM	FDT1: M FDT2: M FDT3: X		X
				ZigBee-PRO	FDT1: M FDT2: M FDT3: X		X

Item number	Item description	Reference	ZigBee Status	Feature set Support		Additional Constraints	Platform Support
NLF130	Can the network layer process network leave commands from parent devices?	[R1]/3.6.1.10.3	FDT1: N/A FDT2: M FDT3: M	ZigBee PRO MM	FDT1: X FDT2: M FDT3: M		X
				ZigBee-PRO	FDT1: X FDT2: M FDT3: M		X
NLF131	Does the network layer inform the next higher layer if the device itself has left the network?	[R1]/3.2.2.17	M	ZigBee PRO MM	M		X
				ZigBee-PRO	M		X
NLF14	Does the device support changing of the ZigBee coordinator configuration in an operating network?	[R1]/3.2.2.3, 3.2.2.4, 3.6.1.11	FDT1: O FDT2: X FDT3: X	ZigBee PRO MM	FDT1: M FDT2: X FDT3: X	The ZigBee coordinator shall change the logical channel and PAN ID when directed to by the Network Channel Manager.	X
				ZigBee-PRO	FDT1: M FDT2: X FDT3: X		X
NLF15	Does the device support changing of the ZigBee router configuration in an operating network?	[R1]/3.2.2.7, 3.2.2.8	FDT1: X FDT2: O FDT3: X	ZigBee PRO MM	FDT1: X FDT2: M FDT3: X	The ZigBee router shall change the logical channel and PAN ID when directed to by the Network Channel Manager.	X
				ZigBee-PRO	FDT1: X FDT2: M FDT3: X		X
NLF16	Does the network layer support reset?	[R1]/3.2.2.19, 3.2.2.20, 3.6.1.12	M	ZigBee PRO MM	M		X
				ZigBee-PRO	M		X

Item number	Item description	Reference	ZigBee Status	Feature set Support		Additional Constraints	Platform Support
NLF17	Does the network layer allow the next higher layer to synchronize with or extract data from the device's ZigBee coordinator or router?	[R1]/3.2.2.22, 3.2.2.23	FDT1: X FDT2: O FDT3: M	ZigBee PRO MM	FDT1: X FDT2: X FDT3: M	<p>Recommended polling rates for end devices using this feature set:</p> <p>Maximum: once per 7.5s Minimum: once per hour</p> <p>Note that these values represent the (rather loose) recommended boundaries on polling rate for normal operation only.</p> <p>Additionally, the polling rate established to meet this requirement shall have a maximum value less than <i>nwkTransactionPersistenceTime</i> to ensure that child devices can poll frequently enough to retrieve messages prior to expiration in the indirect message queue of their parent.</p> <p>The polling rate established here also does not consider APS acknowledgement timeout (which is much shorter than <i>nwkTransaction-PersistenceTime</i>). If APS acknowledged messages are directed to sleeping end devices, then the polling rate of those destination devices may be adjusted to occur more frequently than the APS acknowledgement timeout.</p>	X
				ZigBee-PRO	FDT1: X FDT2: X FDT3: M		X
NLF18	Does the network layer report a loss of synchronization with the device's ZigBee router or ZigBee coordinator to the next higher layer?	[R1]/3.2.2.23	FDT1: X FDT2: O FDT3: M	ZigBee PRO MM	X		X
				ZigBee-PRO	X		X
NLF19	Does the network layer offer the next higher layer the ability to retrieve network information base (NIB) attributes?	[R1]/3.2.2.26, 3.2.2.27	M	ZigBee PRO MM	M		X

Item number	Item description	Reference	ZigBee Status	Feature set Support		Additional Constraints	Platform Support
				ZigBee-PRO	MM		
				ZigBee-PRO	M		X
NLF20	Does the network layer offer the next higher layer the ability to set network information base (NIB) attributes?	[R1]/3.2.2.28, 3.2.2.29	M	ZigBee-PRO MM	M		X
				ZigBee-PRO	M		X
NLF110	Does the network layer support network status reporting to the next higher layer?	[R1]/3.2.2.30	M	ZigBee-PRO MM	FDT1: M FDT2: M FDT3: X		X
				ZigBee-PRO	FDT1: M FDT2: M FDT3: X		X
NLF111	Does the network layer support Route Discovery?	[R1]/3.2.2.31, 3.2.2.32, 3.6.3.5	FDT1: O FDT2: O FDT3: X	ZigBee-PRO MM	FDT1: M FDT2: M FDT3: X		X
				ZigBee-PRO	FDT1: M FDT2: M FDT3: X		X
NLF112	Does the network layer support Route Discovery requests with DstAddrMode of 0x00 in support of Many-to-One discovery?	[R1]/3.2.2.31, 3.2.2.32, 3.6.3.5	FDT1: O FDT2: O FDT3: X	ZigBee-PRO MM	X		X

Item number	Item description	Reference	ZigBee Status	Feature set Support		Additional Constraints	Platform Support
				ZigBee-PRO	FDT1: O FDT2: O FDT3: X	Initiation of a Many-to-One route discovery is optional, and should be used in cases where there are relatively few concentrators in the network. Application developers should weigh the trade-offs between Many-to-One discovery and unicast discovery before deploying.	X
NLF113	Does the network layer support Route Discovery requests with DstAddrMode of 0x01 in support of Multicast Group Discovery?	[R1]/3.2.2.31, 3.2.2.32, 3.6.3.5, 3.6.6	FDT1: O FDT2: O FDT3: X	ZigBee PRO MM	X		Click here to enter text.
				ZigBee-PRO	FDT1: O FDT2: O FDT3: X	Initiation of route discovery commands where DstAddrMode is 0x01 (Multicast Group Discovery) is optional.	Click here to enter text.
NLF114	Does the network layer support Route Discovery requests with DstAddrMode of 0x02 in support of the discovery of Unicast routes?	[R1]/3.2.2.31, 3.2.2.32, 3.6.3.5	FDT1: O FDT2: O FDT3: X	ZigBee PRO MM	FDT1: O FDT2: O FDT3: X	Initiation of route discovery commands where DstAddrMode is 0x02 (Unicast) is optional.	X
				ZigBee-PRO	FDT1: O FDT2: O FDT3: X	ZigBee coordinators and ZigBee routers shall support reception and correct handling of unicast discovery commands.	X
NLF115	Does the network layer employ tree routing?	3.6.3.3	O	ZigBee PRO MM	M	Devices using the ZigBee stack profile must set: <i>nwkUseTreeRouting</i> = TRUE	Click here to enter text.
				ZigBee-PRO	X	Devices using the ZigBee-PRO stack profile shall set: <i>nwkUseTreeRouting</i> = FALSE	Click here to enter text.
NLF21		3.6.3.1	O	ZigBee PRO MM	FDT1: M FDT2: M FDT3: X		X



Item number	Item description	Reference	ZigBee Status	Feature set Support		Additional Constraints	Platform Support
				ZigBee-PRO	ZigBee-PRO MM		
	Does the network layer calculate routing cost based on probability of reception?			ZigBee-PRO	FDT1: M FDT2: M FDT3: X		X
NLF22	Does the network layer maintain a routing table and route discovery table?	[R1]/3.6.3.2	FDT1: O FDT2: O FDT3: X	ZigBee-PRO MM	FDT1: M FDT2: M FDT3: X	ZigBee coordinators and ZigBee routers shall maintain a routing table and a route discovery table as follows:  Routing table (minimum): 8 entries  Route discovery table (minimum): 4 entries	X
				ZigBee-PRO	FDT1: M FDT2: M FDT3: X	ZigBee coordinators and ZigBee routers shall maintain a routing table and a route discovery table as follows:  Routing table (minimum): 10 entries  An aging algorithm is recommended but is beyond the scope of this specification.  Route discovery table entries (minimum): 4 entries  The Route discovery table entries shall be managed as described in [R1] sub-clause 3.6.3.6.	X
NLF220	Does the network layer maintain a route record table?	[R1]/3.5.2, 3.6.3.2	FDT1: O FDT2: O FDT3: X	ZigBee-PRO MM	X		X
				ZigBee-PRO	FDT1: O FDT2: O FDT3: X		X
NLF221	Does the network layer maintain a multicast group ID table?	[R1]/3.6.6.1	FDT1:O, FDT2:O, FDT3:X	ZigBee-PRO MM	X	ZigBee coordinators and ZigBee routers that use this stack profile shall set <i>mwkUseMulticast</i> to FALSE.	Click here to enter text.
				ZigBee-PRO	FDT1: O FDT2: O FDT3: X		Click here to enter text.

Item number	Item description	Reference	ZigBee Status	Feature set Support		Additional Constraints	Platform Support
				ZigBee PRO MM	ZigBee-PRO		
NLF23	Does the network layer reserve routing capacity for route repair operations?  (Note: This capability has been removed from the ZigBee specification as of r08).	None	X	ZigBee PRO MM	X		Click here to enter text.
				ZigBee-PRO	X		Click here to enter text.
NLF24	Does the device implement beacon collision-avoidance measures?	[R1]/3.6.4	O	ZigBee PRO MM	X		Click here to enter text.
				ZigBee-PRO	X		Click here to enter text.
NLF25	Does the network layer support router re-enumeration as a route repair method?  (Note: This capability has been removed from the ZigBee specification as of r10).	None	X	ZigBee PRO MM	X		Click here to enter text.
				ZigBee-PRO	X		Click here to enter text.
NLF26	Does the network layer assume that links are symmetrical and establish forward and reverse routes at the same time?	[R1]/3.5.2, 3.6.3.5.2	O	ZigBee PRO MM	X	Devices using the ZigBee stack profile must set: <i>nwkSymLink</i> = FALSE	Click here to enter text.
				ZigBee-PRO	M	Devices using the ZigBee-PRO stack profile shall set: <i>nwkSymLink</i> = TRUE	X
NLF27	Does the network layer maintain a neighbor table or tables in order to store information about nearby devices?	[R1]/3.6.1.5	M	ZigBee PRO MM	M	ZigBee coordinators and ZigBee routers shall maintain a neighbor table or tables as follows:  ZigBee coordinator (minimum): 24 entries  ZigBee router (minimum): 25 entries  ZigBee end device (minimum): 1 entry	X

Item number	Item description	Reference	ZigBee Status	Feature set Support		Additional Constraints	Platform Support
				ZigBee-PRO	M	<p>ZigBee coordinators and ZigBee routers shall maintain a neighbor table or tables as follows:</p> <p>ZigBee coordinator (minimum): (Number of child end devices accepted) plus 16</p> <p>ZigBee router (minimum): (Number of child end devices accepted) plus 16</p> <p>ZigBee end device: 1 (Note: End Device shall support a minimum of 5 neighbor table entries and that entry shall be for their parent) (CCB 2091)</p> <p>Where (Number of child end devices accepted) is the minimum number of end device children that a particular router or coordinator in the network is configured to accept.</p>	X
NLF28	Does the network layer buffer frames pending route discovery or route repair operations?	[R1]/3.6.3.5.1	O	ZigBee PRO MM	O		Click here to enter text.
				ZigBee-PRO	O		Click here to enter text.
NLF29	Does the network layer buffer data frames on behalf of end device that are its children?	[R1]/3.6.5	FDT1:M FDT2:M FDT3:X	ZigBee PRO MM	FDT1: M FDT2: M FDT3: X	ZigBee router and coordinator devices shall set:  Number of frames buffered on behalf of sleeping end devices (minimum): 1	X
				ZigBee-PRO	FDT1: M FDT2: M FDT3: X	Note that this means 1 frame TOTAL not 1 frame for each end device. In other words, it is up to the implementer to put in some buffering but routers should not be overburdened with, possibly unnecessary, buffering.	X
NLF30			O	ZigBee PRO MM	X		Click here to enter text.

Item number	Item description	Reference	ZigBee Status	Feature set Support		Additional Constraints	Platform Support
	Is the device capable of participating in a beacon-oriented network?	[R1]/Preface Definitions and Network Topology sections		ZigBee-PRO	X	On invocation of the NLME-NETWORK-FORMATION.request or NLME-START-ROUTER.request primitives, devices shall employ:  BeaconOrder = 0x0f SuperframeOrder = 0x0f	<a href="#">Click here to enter text.</a>
NLF31	Does the network layer support the detection of address conflicts?	[R1]/3.6.1.9	O	ZigBee PRO MM	X		X
				ZigBee-PRO	FDT1: M FDT2: M FDT3: X	Address conflict detection is mandatory for this stack profile (nwkUniqueAddr = FALSE). The coordinator and all routers shall implement the Address Conflict procedure.	X
NLF32	Does the network layer support resolving address conflicts?	[R1]/3.6.1.9.3	FDT1: O FDT2: O FDT3: X	ZigBee PRO MM	X		X
				ZigBee-PRO	FDT1: M FDT2: M FDT3: X	Address conflict resolution is mandatory for this stack profile (nwkUniqueAddr = FALSE). The coordinator and all routers shall implement the Address Conflict procedure.	X
NLF33	Does the network layer support the detection of PAN ID conflicts?	[R1]/3.6.1.13	O	ZigBee PRO MM	FDT1:M FDT2:M FDT3:X	PAN ID conflict resolution is mandatory for the coordinator and routers. Notification of a PAN ID conflict via the NWK Status command frame directed to the nwkManagerAddr is mandatory for all routers and the coordinator. The nwkManagerAddr is required to process all NWK Status command frames directed to it by the coordinator and routers.	X
				ZigBee-PRO	FDT1:M FDT2:M FDT3:X		X

Item number	Item description	Reference	ZigBee Status	Feature set Support		Additional Constraints	Platform Support
NLF34	Does the device support resolving PAN ID conflicts?	[R1]/3.6.1.13	O	ZigBee PRO MM	FDT1: M FDT2: M FDT3: X	PAN ID conflict resolution is mandatory for the coordinator and routers. Notification of a PAN ID conflict via the NWK Status command frame directed to the nwkManagerAddr is mandatory for all routers and the coordinator. The nwkManagerAddr is required to process all NWK Status command frames directed to it by the coordinator and routers.	X
				ZigBee-PRO	FDT1: M FDT2: M FDT3: X		X

556

557 **10.4.2.2 Network layer frames**

Item number	Item description	Reference	ZigBee Status	Feature set Support		Additional Constraints	Platform Support
NDF1	Does the device support the origination of network data frames?	[R1]/3.3.2.1, 3.6.2.1	M	ZigBee-PRO MM	M		X
				ZigBee-PRO	M		X
NDF2	Does the device support the receipt of network data frames?	[R1]/3.3.2.1, 3.6.2.2	M	ZigBee PRO MM	M		X
				ZigBee-PRO	M		X
NDF3	Does the device support the relaying of unicast network data frames?	[R1]/3.3.2.1, 3.6.3.3	FDT1: M FDT2: M FDT3: X	ZigBee PRO MM	FDT1: M FDT2: M FDT3: X		X
				ZigBee-PRO	FDT1: M FDT2: M FDT3: X		X

558

Item number	Item description	Reference	ZigBee Status	Feature set Support		Additional Constraints	Platform Support
NDF4	Does the device support relaying of broadcast network data frames?	[R1]/3.3.2.1, 3.6.5	FDT1: M FDT2: M FDT3: X	ZigBee PRO MM	FDT1: M FDT2: M FDT3: X	Devices using the ZigBee stack profile must set:  Broadcast Transaction Table size: 9 (minimum)  <i>nwkBroadcastDeliveryTime</i> = 0x44AA2 <sup>4</sup> Octet durations (9 seconds on 2.4 GHz) <i>nwkPassiveAckTimeout</i> = 0x3D09 <sup>5</sup> Octet durations <sup>6</sup> (500 ms on 2.4 GHz) maximum <i>nwkMaxBroadcastRetries</i> = 2	X
				ZigBee-PRO	FDT1: M FDT2: M FDT3: X	Devices using the ZigBee-PRO stack profile shall set:  Broadcast Transaction Table size: 9 (minimum)  <i>nwkBroadcastDeliveryTime</i> = 0x44AA2 <sup>7</sup> Octet durations (9 seconds on 2.4 GHz) <i>nwkPassiveAckTimeout</i> = 0x3D09 <sup>8</sup> Octet Durations <sup>9</sup> (500 ms on 2.4 GHz) maximum <i>nwkMaxBroadcastRetries</i> = 2  Application designers should take care to use multicast and broadcast sparingly due to the limitations of the broadcast bandwidth of a network.	X
NDF100	Does the device support relaying of multicast network data frames?	[R2]/3.3.2.1, 3.6.6	FDT1: O FDT2: O FDT3: X	ZigBee PRO MM	X		X
				ZigBee-PRO	FDT1: M FDT2: M FDT3: X	The coordinator and all routers in a PRO network shall be able to relay member mode multicast network data frames.	X
NDF101		[R2]/3.3.2.1, 3.6.3.3.2	FDT1:O, FDT2:O, FDT3:X	ZigBee PRO MM	X		Click here to enter text.

<sup>4</sup> CCB 1629

<sup>5</sup> CCB 1633

<sup>6</sup> CCB 1633

<sup>7</sup> CCB 1629

<sup>8</sup> CCB 1633

<sup>9</sup> CCB 1633

Item number	Item description	Reference	ZigBee Status	Feature set Support	Additional Constraints	Platform Support
	Does the device support the relaying of source routed network data frames?			ZigBee-PRO FDT1: M FDT2: M FDT3: X		X
NDF102	Does the device support conditionally setting the End Device Initiator bit of the NWK frame control?	[R1]/3.3.1.1.9		ZigBee-PRO FDT1: X FDT2: X FDT3: M		X
NDF103	Does the device support processing NWK data frames with the End Device Initiator bit set?	[R1]/3.6.2.2		ZigBee-PRO FDT1: M FDT2: M FDT3: X		X
NDF104	Does the device support aging out children that have not sent a keepalive within the configured timeout?	[R1]/3.6.10		ZigBee-PRO FDT1: M FDT2: M FDT3: X		X
NDF105	Does the device support reception of a MAC Data poll as an End Device Keepalive?	[R1]/3.6.10.4	O	ZigBee-PRO FDT1: O FDT2: O FDT3: M	It is permissible to not have support for this if NDF106 is supported.	X
NDF106	Does the device support reception of an end device timeout keep alive? (CCB 2144)	[R1]/3.6.10.5	M	ZigBee-PRO FDT1: MFDT2: M FDT3: M	It is permissible to not have support for this if NDF105 is supported.	X
NDF107	Does the device support persistence of the end device configuration for end devices?	[R1]/3.6.10.8		ZigBee-PRO FDT1: M FDT2: M FDT3: X		X
NDF108	Does the device support sending a NWK leave message to an end device that is NOT in its neighbor table?	[R1]/3.6.10.4.1	M	ZigBee-PRO / ZigBee MB FDT1: M FDT2: M FDT3: X	It is permissible to not have support for this if NDF109 is supported NDF105 must be supported to support NDF108 (CCB 2239).	X
NDF109	Does the device support sending a ZDO_Mgmt_Leave_Req message to an end device that is NOT in its neighbor table?	[R1]/3.6.10.4.1		ZigBee-PRO / ZigBee MB FDT1: M FDT2: M FDT3: X	It is permissible to not have support for this if NDF108 is supported. NDF105 must be supported to support NDF109 (CCB 2239).	X

Item number	Item description	Reference	ZigBee Status	Feature set Support		Additional Constraints	Platform Support
NDF110	Does the end device support timing itself when it does not send a keepalive to its router parent within its timeout?	[R1]/3.6.10.7		ZigBee-PRO / ZigBee MB	FDT1: X FDT2: X FDT3: O		XX
F-GP1	Does the device support the Green Power Feature? (CCB 2240)	[R1]/2.1.2	O	ZigBee-PRO / ZigBee MB	FDT1: O FDT2: O FDT3: O	Refer to Refer to [R7] and [R8] for additional details  The Green Power cluster if implemented shall use endpoint 242.	X
NDF201	Does the device support reception of ZigBee NWK frames with non-incremental sequence number in the NWK header Sequence Number field?	[R1]/4.3.1.1, 4.3.1.2	M	ZigBee-PRO / ZigBee MB	FDT1: X FDT2: X FDT3: O	Included use of GP.  Unconditionally mandatory for R22 CORE stack and later for all devices (CCB 2240)	X

559

#### 10.4.2.3 Network command frames

Item number	Item description	Reference	ZigBee Status	Feature set Support		Additional Constraints	Platform Support
NCF1	Does the device support the origination of route request command frames?	[R1]/3.4.1, 3.6.3.5.1	FDT1: O FDT2: O FDT3: X	ZigBee PRO MM	FDT1: M FDT2: M FDT3: X		X
				ZigBee- PRO	FDT1: M FDT2: M FDT3: X		X
NCF2	Does the device support the receipt of route request command frames?	[R1]/3.4.1, 3.6.3.5.2	FDT1: M FDT2: M FDT3: X	ZigBee PRO MM	FDT1: M FDT2: M FDT3: X		X
				ZigBee- PRO	FDT1: M FDT2: M FDT3: X		X
NCF3		[R1]/3.4.1, 3.6.3.5.2	FDT1: M FDT2: M FDT3: X	ZigBee PRO MM	FDT1: M FDT2: M FDT3: X		X



Item number	Item description	Reference	ZigBee Status	Feature set Support		Additional Constraints	Platform Support
	Does the device support the relaying of route request command frames?			ZigBee-PRO	FDT1: M FDT2: M FDT3: X		X
NCF4	Does the device support the origination of route reply command frames?	[R1]/3.4.2, 3.6.3.5.2	FDT1:M, FDT2:M, FDT3:X	ZigBee PRO MM	FDT1: M FDT2: M FDT3: X		X
				ZigBee-PRO	FDT1: M FDT2: M FDT3: X		X
NCF5	Does the device support the receipt of route reply command frames?	[R1]/3.4.2, 3.6.3.5.3	FDT1: O FDT2: O FDT3: X	ZigBee PRO MM	FDT1: M FDT2: M FDT3: X		X
				ZigBee-PRO	FDT1: M FDT2: M FDT3: X		X
NCF6	Does the device support the relaying of route reply command frames?	[R1]/3.4.2, 3.6.3.5.3	FDT1:M, FDT2:M, FDT3:X	ZigBee PRO MM	FDT1: M FDT2: M FDT3: X		X
				ZigBee-PRO	FDT1: M FDT2: M FDT3: X		X
NCF7	Does the device support the transmission of network status command frames?	[R1]/3.4.3, 3.6.1.9.3, 3.6.3.3, 3.6.3.7.1	FDT1: M FDT2: M FDT3: X	ZigBee PRO MM	FDT1: M FDT2: M FDT3: X		X
				ZigBee-PRO	FDT1: M FDT2: M FDT3: X		X
NCF8	Does the device support the receipt of network status command frames?	[R1]/3.4.3, 3.6.1.9.3, 3.6.3.7.1	M	ZigBee PRO MM	FDT1: M FDT2: M FDT3: X		X

Item number	Item description	Reference	ZigBee Status	Feature set Support		Additional Constraints	Platform Support
				ZigBee PRO	ZigBee PRO MM		
				ZigBee PRO	FDT1: M FDT2: M FDT3: X		X
NCF9	Does the device support the relaying of network command frames? In particular, does it support the relaying of those command frames, specifically network status, network report and network update, which require relaying but for which there are no special per-hop processing requirements?	[R1]/3.4.3, 3.4.9, 3.4.10	FDT1:M, FDT2:M, FDT3:X	ZigBee PRO MM	FDT1: M FDT2: M FDT3: X		X.
				ZigBee PRO	FDT1: M FDT2: M FDT3: X		X
NCF100	Does the device support the origination of leave command frames?	[R1]/3.4.4, 3.6.1.10	FDT1:O, FDT2:O, FDT3:O	ZigBee PRO MM	FDT1: M FDT2: M FDT3: M		X
				ZigBee PRO	FDT1: M FDT2: M FDT3: M		X
NCF101	Does the device support the receipt of leave command frames?	[R1]/3.4.4, 3.6.1.10	M	ZigBee PRO MM	M		X
				ZigBee PRO	M		X
NCF103	Does the device support the origination of route record command frames?	[R1]/3.4.5, 3.6.3.5.4	FDT1: O FDT2: O FDT3: X	ZigBee PRO MM	X		X
				ZigBee PRO	FDT1: M FDT2: M FDT3: X		X

Item number	Item description	Reference	ZigBee Status	Feature set Support		Additional Constraints	Platform Support
				ZigBee PRO MM	ZigBee PRO		
NCF104	Does the device support the receipt of route record command frames?	[R1]/3.4.5, 3.6.3.5.4	FDT1: O FDT2: O FDT3: X	ZigBee PRO MM	X		X
				ZigBee PRO	FDT1: M FDT2: M FDT3: X		X
NCF105	Does the device support the relaying of route record command frames?	[R1]/3.4.5, 3.6.3.5.4	FDT1: O FDT2: O FDT3: X	ZigBee PRO MM	X		X
				ZigBee PRO	FDT1: M FDT2: M FDT3: X		X
NCF106	Does the device support the transmission of rejoin request command frames?	[R1]/3.4.6, 3.7.1.3.2.1	FDT1: X FDT2: M FDT3: M	ZigBee PRO MM	FDT1: X FDT2: M FDT3: M		X
				ZigBee PRO	FDT1: X FDT2: M FDT3: M		X
NCF107	Does the device support the reception of rejoin request command frames?	[R1]/3.4.6, 3.7.1.3.2.2	FDT1: M FDT2: M FDT3: X	ZigBee PRO MM	FDT1: M FDT2: M FDT3: X		X
				ZigBee PRO	FDT1: M FDT2: M FDT3: X		X
NCF108		[R1]/3.4.7, 3.7.1.3.2.2	FDT1: M FDT2: M FDT3: X	ZigBee PRO MM	FDT1: M FDT2: M FDT3: X		X

Item number	Item description	Reference	ZigBee Status	Feature set Support		Additional Constraints	Platform Support
	Does the device support the transmission of rejoin response command frames?			ZigBee-PRO	FDT1: M FDT2: M FDT3: X		X
NCF109	Does the device support the reception of rejoin response command frames?	[R1]/3.4.7, 3.7.1.3.2.1	FDT1: X FDT2: M FDT3: M	ZigBee PRO MM	FDT1: X FDT2: M FDT3: M		X
				ZigBee-PRO	FDT1: X FDT2: M FDT3: M		X
NCF110	Does the device support the generation of a network report command frame.	[R1]/3.4.9, 3.6.1.13.1	O	ZigBee PRO MM	FDT1: X FDT2: M FDT3: M		X
				ZigBee-PRO	FDT1: X FDT2: M FDT3: M		X
NCF111	Does the device support the reception of a network report command frame	[R1]/3.4.9, 3.6.1.13.2	O	ZigBee PRO MM	FDT1: O FDT2: O FDT3: X	While this feature is optional, one device in the network must be designated as the network manager and for that device this feature is mandatory.	X
				ZigBee-PRO	FDT1: O FDT2: O FDT3: X		X
NCF112	Does the device support the generation of a network update command frame.	[R1]/3.4.10, 3.6.1.13.2	O	ZigBee PRO MM	FDT1: O FDT2: O FDT3: X	While this feature is optional, one device in the network must be designated as the network manager and for that device this feature is mandatory.	X
				ZigBee-PRO	FDT1: O FDT2: O FDT3: X		X
NCF113		[R1]/3.4.10, 3.6.1.13.3	O	ZigBee PRO MM	FDT1: M FDT2: M FDT3: M		X

Item number	Item description	Reference	ZigBee Status	Feature set Support		Additional Constraints	Platform Support
				ZigBee-PRO	ZigBee-PRO MM		
	Does the device support the reception of a network update command frame			ZigBee-PRO	FDT1: M FDT2: M FDT3: M		X
NCF114	Does the device support the generation of a link status command frame.	[R1]/3.4.8, 3.6.3.4.1	FDT1: O FDT2: O FDT3: X	ZigBee-PRO MM	X		X
				ZigBee-PRO	FDT1: M FDT2: M FDT3: X		X
NCF115	Does the device support the reception of a link status command frame.	[R1]/3.4.8, 3.6.1.5, 3.6.3.4.2	FDT1: O FDT2: O FDT3: X	ZigBee-PRO MM	X		X
				ZigBee-PRO	FDT1: M FDT2: M FDT3: X		X
NCF116 <sup>10</sup>	Does the device support ignoring the NWK leave command?	[R1]/3.5.2, 3.6.1.10.3	FDT1:O FDT2: O FDT3:X	ZigBee-PRO	FDT1: O FDT2: O FDT3: X		X

<sup>10</sup> CCB 1279

560 **10.5 Security PICS**

561 **10.5.1 ZigBee security roles**

Item number	Item description	Reference	ZigBee Status	Feature set Support		Additional Constraints	Platform Support
SR1	Is this device capable of acting in the role of a trust center?	[R1]/1.4, 4.6.2	FDT1: M FDT2: O FDT3: X	ZigBee PRO MM	FDT1: M FDT2: O FDT3: X	Upon initial network formation, the coordinator must at least temporarily serve as the trust center. After formation, at least one of the routers or the coordinator must be capable of acting in the role of the trust center. It is an application responsibility to transition the trust center from the coordinator to another router device pointed to by apsTrustCenterAddress within all devices in the network if desired. For the device whose address is apsTrustCenterAddress, it is mandatory to act in the role of the trust center. All devices in the network shall maintain a single consistent definition of apsTrustCenterAddress. It is possible, under application control, to change apsTrustCenterAddress during later network operation, however, it is the application's responsibility to ensure that all devices in the network are notified of the change.  Trust center must be collocated with ZC (short address 0x0000) throughout network life (CCB 2178)	X
				ZigBee-PRO	FDT1: M FDT2: O FDT3: X		X

562

563

564 **10.5.2 ZigBee trust center capabilities**

Item number	Item description	Reference	ZigBee Status	Feature set Support		Additional Constraints	Platform Support
TCC1	Is this device capable of acting as a ZigBee trust center in high security mode?	[R1]/1.4.1.2, 4.6.2.1	SR1:O.2	ZigBee PRO MM	X		Click here to enter text.
				ZigBee-PRO	SR1: O.2	<p>Every PRO network shall have a Trust Center either running in Standard or High Security mode</p> <p>The device designated as the Trust Center shall be declared a concentrator in a PRO network and a Many to One route shall be created to the Trust Center.</p> <p>At least one of TCC1 or TCC2 must be supported if the device supports SR1.</p> <p>Trust center must be collocated with ZC (short address 0x0000) throughout network life (CCB 2178)</p>	Click here to enter text.
TCC2	Is this device capable of acting as a ZigBee trust center in standard mode?	[R1]/1.4.1.2, 4.6.2.2	SR1:O.2	ZigBee PRO MM	M		X
				ZigBee-PRO	SR1: O.2	<p>Every PRO network shall have a Trust Center either running in Standard or High Security mode</p> <p>The device designated as the Trust Center shall be declared a concentrator in a PRO network and a Many to One route shall be created to the Trust Center.</p> <p>At least one of TCC1 or TCC2 must be supported if the device supports SR1.</p> <p>Trust center must be collocated with ZC (short address 0x0000) throughout network life (CCB 2178)</p>	X

565

566

567 **10.5.3 Modes of operation**

Item number	Item description	Reference	ZigBee Status	Feature set Support		Additional Constraints	Platform Support
MOO1	Is this device capable of operating in a network secured with a trust center running in high security mode?	[R1]/1.4.1.2, 4.6.2.1	O.3	ZigBee PRO MM	X		Click here to enter text.
				ZigBee-PRO	O.3	A PRO device shall join a PRO network either running in Standard or High Security mode. At least one of MOO1 or MOO2 must be supported.	Click here to enter text.
MOO2	Is this device capable of operating in a network secured with a trust center running in standard mode?	[R1]/1.4.1.2,	O.3	ZigBee PRO MM	M		X
				ZigBee-PRO	O.3	A PRO device shall join a PRO network either running in Standard or High Security mode. At least one of MOO1 or MOO2 must be supported.	X

568

569 **10.5.4 Security levels**

Item number	Item description	Reference	ZigBee Status	Feature set Support		Additional Constraints	Platform Support
SL1	Is this device capable of supporting security level 0x01?	[R1]/4.5.1.1.1	O.4	ZigBee PRO MM	X	The device shall not apply security to outgoing frames or accept secured incoming frames using any level other than level 0x05.	Click here to enter text.
				ZigBee-PRO	X		Click here to enter text.
SL2	Is this device capable of supporting security level 0x02?	[R1]/4.5.1.1.1	O.4	ZigBee PRO MM	X	The device shall not apply security to outgoing frames or accept secured incoming frames using any level other than level 0x05.	Click here to enter text.
				ZigBee-PRO	X		Click here to enter text.



Item number	Item description	Reference	ZigBee Status	Feature set Support		Additional Constraints	Platform Support
				ZigBee PRO MM	ZigBee-PRO		
SL3	Is this device capable of supporting security level 0x03?	[R1]/4.5.1.1.1	O.4	ZigBee PRO MM	X	The device shall not apply security to outgoing frames or accept secured incoming frames using any level other than level 0x05.	Click here to enter text.
				ZigBee-PRO	X		Click here to enter text.
SL4	Is this device capable of supporting security level 0x04?	[R1]/4.5.1.1.1	O.4	ZigBee PRO MM	X	The device shall not apply security to outgoing frames or accept secured incoming frames using any level other than level 0x05.	Click here to enter text.
				ZigBee-PRO	X		Click here to enter text.
SL5	Is this device capable of supporting security level 0x05?	[R1]/4.5.1.1.1	O.4	ZigBee PRO MM	M	The device shall apply security to outgoing frames or accept secured incoming frames using only level 0x05 (i.e., ENC-MIC-32)	X
				ZigBee-PRO	M		X
SL6	Is this device capable of supporting security level 0x06?	[R1]/4.5.1.1.1	O.4	ZigBee PRO MM	X	The device shall not apply security to outgoing frames or accept secured incoming frames using any level other than level 0x05.	Click here to enter text.
				ZigBee-PRO	X		Click here to enter text.
SL7	Is this device capable of supporting security level 0x07?	[R1]/4.5.1.1.1	O.4	ZigBee PRO MM	X	The device shall not apply security to outgoing frames or accept secured incoming frames using any level other than level 0x05.	Click here to enter text.
				ZigBee-PRO	X		Click here to enter text.

570

571

572 **10.5.5 NWK layer security**

Item number	Item description	Reference	ZigBee Status	Feature set Support		Additional Constraints	Platform Support
NLS1	Does the device support the security processing of NWK layer outgoing frames?	[R1]/4.3.1.1	M	ZigBee PRO MM	M		X
				ZigBee-PRO	M		X
NLS2	Does the device support the security processing of NWK layer incoming frames?	[R1]/4.3.1.2	M	ZigBee PRO MM	M		X
				ZigBee-PRO	M		X
NLS3	Does the device support the ZigBee secured NWK layer frame format?	[R1]/4.3.1	M	ZigBee PRO MM	M		X
				ZigBee-PRO	M		X
NLS4	Does the device support the ability to manage at least one network key and corresponding outgoing frame counter?	[R1]/4.2.1.3, 4.3.3	M	ZigBee PRO MM	M		X
				ZigBee-PRO	M		X

Item number	Item description	Reference	ZigBee Status	Feature set Support		Additional Constraints	Platform Support
NLS5	Does the device support the ability to manage two network keys and corresponding outgoing frame counter?	[R1]/4.2.1.3, 4.3.1, 4.3.3	O	ZigBee PRO MM	M	All devices shall maintain at least 2 NWK keys with the frame counters consistent with the security mode of the network (Standard or High).  A NWK key of all zero's shall be treated as reserved. Due to the fact that a NWK key of all zero's was used as a "dummy key" and employed in the trust center exchange where pre-configured keys are used, a NWK key of all zero's is indistinguishable from transport of a dummy key.	X
				ZigBee-PRO	M		X
NLS7	Does the device support at least one frame counter for incoming NWK layer frames for each potential source of incoming frames (e.g., a coordinator or router should support the same number of counters per network key as the maximum number of neighbor table entries and an end device should support one counter per network key)?	[R1]/4.2.1.3, 4.3.1, 4.3.3	O	ZigBee PRO MM	M	Devices using this stack profile in Standard Security and High Security mode shall store a single frame counter per neighbor table entry associated with the current NWK Key.	X
				ZigBee-PRO	M		X
NLS8	Does the device support a setting to indicate that all incoming NWK frames must be checked for freshness (i.e., <i>nwkAllFresh</i> )?	[R1]/4.4.1.2, 4.6.2.1, 4.6.2.2	MOO1: M MOO2: O	ZigBee PRO MM	MOO1: M MOO2: O	See also the trust centre policies document [R4].	X
				ZigBee-PRO	MOO1: M MOO2: O		X

Item number	Item description	Reference	ZigBee Status	Feature set Support		Additional Constraints	Platform Support
XNLS9	Does the device support the ability to secure all incoming and outgoing NWK frames (i.e., the <i>nwkSecureAllFrames</i> attribute of the NIB)?	[R1]/4.2.3, 4.6	O	ZigBee PRO MM	M	Devices using the ZigBee and ZigBee-PRO feature sets shall set:  <i>nwkSecureAllFrames</i> = TRUE	X
				ZigBee-PRO	M		X
NLS10	Does the device support the ability to reject frames from neighbors which have not been properly authenticated?	[R1]/4.2.3, 4.6	O	ZigBee PRO MM	MOO1: M MOO2: O	Coordinator and Router devices employing ZigBee and ZigBee PRO Standard Mode security shall not reject frames from neighbors which have not been properly authenticated. Coordinator and Router devices employing ZigBee PRO High Security shall reject frames from neighbors which have not been properly authenticated.	X
				ZigBee-PRO	MOO1: M MOO2: O		X

573

574 **10.5.6 APS layer security**

Item number	Item description	Reference	ZigBee Status	Feature set Support		Additional Constraints	Platform Support
ASLS1	Does the device support the security processing of APS layer outgoing frames?	[R1]/4.4.1.1	M	ZigBee PRO MM	M		X
				ZigBee-PRO	M		X
ASLS2	Does the device support the security processing of APS layer incoming frames?	[R1]/4.4.1.2	M	ZigBee PRO MM	M		X

Item number	Item description	Reference	ZigBee Status	Feature set Support		Additional Constraints	Platform Support
				ZigBee-PRO	MM		
				ZigBee-PRO	M		X
ASLS3	Does the device support the ZigBee secured APS layer frame format?	[R1]/4.4.7.3	M	ZigBee-PRO MM	M		X
				ZigBee-PRO	M		X
ASLS4	Does the device support the ability to manage trust center master keys?	[R1]/4.4.3, 4.4.10, 4.6.3	O	ZigBee-PRO MM	MOO1: M MOO2: O	In ZigBee and ZigBee PRO Standard Mode security, trust center master keys are optional for all devices. In ZigBee PRO High Security, trust center master keys mandatory for all devices.	Click here to enter text.
				ZigBee-PRO	MOO1: M MOO2: O		Click here to enter text.
ASLS5	Does the device support the ability to manage application master keys?	[R1]/4.2.3.5, 4.4.3, 4.4.6, 4.4.10, 4.6.3.5	O	ZigBee-PRO MM	O	In ZigBee and ZigBee PRO Standard and ZigBee PRO High security modes, application master keys are optional for all devices.	Click here to enter text.
				ZigBee-PRO	O		Click here to enter text.
ASLS6	Does the device support the ability to manage application data keys and corresponding security material (e.g., the incoming and outgoing frame counters)?	[R1]/4.2.1.3, 4.4.1, 4.4.10	O	ZigBee-PRO MM	O		Click here to enter text.
				ZigBee-PRO	O		Click here to enter text.
ASLS7	Does the device support network key incoming frame counters for incoming APS layer frames secured with the network key?	[R1]/4.4.1.2, 4.3.3	O	ZigBee-PRO MM	X	ZigBee and ZigBee PRO Standard Mode or ZigBee-PRO High Mode security use nwkSecure-AllFrames=TRUE, the APS security header is not employed when the network key is used for incoming APS layer frames.	Click here to enter text.
				ZigBee-PRO	X		Click here to enter text.

Item number	Item description	Reference	ZigBee Status	Feature set Support		Additional Constraints	Platform Support
				ZigBee PRO MM	ZigBee PRO		
ASLS8	Does the device support establish-key service using the Symmetric-Key Key Establishment (SKKE) protocol?	[R1]/4.2.3.1, 4.4.2, 4.4.9.1	O	ZigBee PRO MM	MOO1: M MOO2: O	In ZigBee and ZigBee PRO Standard Mode security, SKKE is optional for all devices. In ZigBee PRO High Security, SKKE is mandatory for all devices.	Click here to enter text.
				ZigBee PRO	MOO1: M MOO2: O		Click here to enter text.
ASLS9	Does the device support the origination of transport-key commands?	[R1]/4.2.3.2, 4.4.3, 4.4.9.2	SR1: M	ZigBee PRO MM	SR1: M		X
				ZigBee PRO	SR1: M		X
ASLS10	Does the device support the receipt of transport-key commands?	[R1]/4.2.3.2, 4.4.3, 4.4.9.2	O	ZigBee PRO MM	M	A newly joined device in ZigBee or ZigBee PRO Standard and ZigBee PRO High Security shall be capable of receiving the NWK key from the trust center via transport-key commands.	X
				ZigBee PRO	M		X
ASLS11	Does the device support the origination of update-device commands?	[R1]/4.2.3.3, 4.4.4, 4.4.9.3	FDT1: O FDT2: O FDT3: X	ZigBee PRO MM	FDT1: M FDT2: M FDT3: X		X
				ZigBee PRO	FDT1: M FDT2: M FDT3: X		X
ASLS12	Does the device support the receipt of update-device commands?	[R1]/4.2.3.3, 4.4.4, 4.4.9.3	SR1: M	ZigBee PRO MM	SR1: M		X
				ZigBee PRO	SR1: M		X

Item number	Item description	Reference	ZigBee Status	Feature set Support		Additional Constraints	Platform Support
ASLS13	Does the device support the origination of remove-device commands?	[R1]/4.2.3.4, 4.4.5, 4.4.9.4	SR1:M	ZigBee PRO MM	SR1: M		X
				ZigBee-PRO	SR1: M		X
ASLS14	Does the device support the receipt of remove-device commands?	[R1]/4.2.3.4, 4.4.5, 4.4.9.4	FDT1: O FDT2: O FDT3: X	ZigBee PRO MM	FDT1: M FDT2: M FDT3: X	The trust center shall be able to ask a ZigBee router or the ZigBee coordinator to request that a child device leave the network.	X
				ZigBee-PRO	FDT1: M FDT2: M FDT3: X		X
ASLS15	Does the device support the origination of request-key commands?	[R1]/4.2.3.5, 4.4.6, 4.4.9.5	O	ZigBee PRO MM	O		X
				ZigBee-PRO	O		X
ASLS16	Does the device support the receipt of request-key commands?	[R1]/4.2.3.5, 4.4.6, 4.4.9.5	SR1:M	ZigBee PRO MM	SR1: M		X
				ZigBee-PRO	SR1: M		X
ASLS17	Does the device support origination of switch-key commands?	[R1]/4.2.3.6, 4.4.7, 4.4.9.6	SR1:M	ZigBee PRO MM	SR1: M		X
				ZigBee-PRO	SR1: M		X
ASLS18	Does the device support receipt of switch-key commands?	[R1]/4.2.3.6, 4.4.7, 4.4.9.6	O	ZigBee PRO MM	M		X

Item number	Item description	Reference	ZigBee Status	Feature set Support		Additional Constraints	Platform Support
				ZigBee-PRO	MM		
				ZigBee-PRO	M		X
ASLS19	Does the device support origination of tunnel commands?	[R1]/4.4.3.1, 4.4.9.8	SR1:M	ZigBee-PRO MM	MOO1: M MOO2: O	In ZigBee and ZigBee PRO Standard security, the ability to originate tunnel commands from the Trust Center is optional unless using link keys. In ZigBee PRO High Security, it is mandatory.	X
				ZigBee-PRO	MOO1: M MOO2: O		X
ASLS20	Does the device support receipt of tunnel commands?	[R1]/4.4.3.1, 4.4.9.8	O	ZigBee-PRO MM	MOO2: FDT1: O FDT2: O FDT3: X	In ZigBee and ZigBee PRO Standard and High security, the ability for the coordinator and all routers to receive tunnel commands is mandatory.	X
				ZigBee-PRO	MOO1: FDT1: M FDT2: M FDT3: X  MOO2: FDT1: O FDT2: O FDT3: X		X
ASLS21	Does the device support the authentication service using the entity authentication protocol?	[R1]/4.2.3.7, 4.4.8, 4.4.9.7	O	ZigBee-PRO MM	MOO2: FDT1: O FDT2: O FDT3: X	In ZigBee and ZigBee PRO Standard security, the ability to support the authentication service using the entity authentication protocol is optional. In ZigBee PRO High Security, it is mandatory.	X
				ZigBee-PRO	MOO1: FDT1: M FDT2: M FDT3: X  MOO2: FDT1: O FDT2: O FDT3: X		X



575 **10.5.7 Application layer security**

Item number	Item description	Reference	ZigBee Status	Feature set Support		Additional Constraints	Platform Support
ALS1	Is this device capable of learning and maintaining knowledge of its trust center using the <i>apsTrustCenterAddress</i> attribute in the AIB?	[R1]/4.4.11, 4.6.2.2	O	ZigBee PRO MM	O	Trust Center must initially reside on the ZigBee coordinator but may, under application control, move to any router on the PAN as long as all devices in the PAN have their <i>apsTrustCenterAddress</i> attribute updated appropriately by the application.  Trust Center must be collocated with ZC (short address 0x0000) throughout network life (CCB 2178)	X
				ZigBee-PRO	M	X	
ALS2	Is this device capable of following the “joining a secure network procedure” in the role of a router?	[R1]/4.6.3.1	FDT1: O FDT2: O FDT3: X	ZigBee PRO MM	FDT1: M FDT2: M FDT3: X		X
				ZigBee-PRO	FDT1: M FDT2: M FDT3: X		X
ALS3	Is this device capable of following the “joining a secure network procedure” in the role of a joining device?	[R1]/4.6.3.1	O	ZigBee PRO MM	FDT1: X FDT2: M FDT3: M		X
				ZigBee-PRO	FDT1: X FDT2: M FDT3: M		X
ALS4	Is this device capable of following the “authentication procedure” in the role of a trust center?	[R1]/4.6.3.2, 4.6.3.2.2.1	TCC1: O TCC2: O	ZigBee PRO MM	SR1: M		X
				ZigBee-PRO	SR1: M		X

Item number	Item description	Reference	ZigBee Status	Feature set Support		Additional Constraints	Platform Support
				ZigBee PRO MM	ZigBee PRO		
ALS5	Is this device capable of following the “authentication procedure” in the role of a router?	[R1]/4.6.3.2, 4.6.3.2.1	FDT1: O FDT2: O FDT3: X	ZigBee PRO MM	FDT1: M FDT2: M FDT3: X		X
				ZigBee PRO	FDT1: M FDT2: M FDT3: X		X
ALS6	Is this device capable of following the “authentication procedure” in the role of a joining device with a preconfigured network key?	[R1]/4.6.3.2, 4.6.3.2.3.1	O	ZigBee PRO MM	O	For devices implementing ZigBee and ZigBee PRO Standard Security, following the “authentication procedure” in the role of joining device with a pre-configured network key is optional. For devices implementing ZigBee PRO High Security, it is prohibited.	Click here to enter text.
				ZigBee PRO	O		Click here to enter text.
ALS7	Is this device capable of following the “authentication procedure” in the role of a joining device with a preconfigured trust center link key?	[R1]/4.6.3.2, 4.6.3.2.3.2	O	ZigBee PRO MM	O	For devices implementing ZigBee and ZigBee PRO Standard Security, following the “authentication procedure” in the role of joining device with a pre-configured trust center link key is optional. For devices implementing ZigBee PRO High Security, it is mandatory unless the ZigBee PRO High Security Trust Center policy permits in the clear delivery of the master key.	X
				ZigBee PRO	O		X
ALS8		[R1]/4.6.3.2, 4.6.3.2.3.3	O	ZigBee PRO MM	O		Click here to enter text.

Item number	Item description	Reference	ZigBee Status	Feature set Support		Additional Constraints	Platform Support
	Is this device capable of following the “authentication procedure” in the role of a joining device without preconfigured network or trust center link keys?			ZigBee-PRO	O	For devices implementing ZigBee and ZigBee PRO Standard Security, following the “authentication procedure” in the role of joining device without a pre-configured trust center link key is optional and supported by default due to the requirement to permit ZigBee Residential Security Mode devices onto PRO Standard Security networks as end devices. For devices implementing ZigBee PRO High Security, it is optional and supported only if the ZigBee PRO High Security Trust Center policy permits in the clear delivery of the master key.	<a href="#">Click here to enter text.</a>
ALS9	Is this device capable of following the “network key update procedure” in the role of a trust center?	[R1]/4.6.3.4, 4.6.3.4.1	TCC1: O TCC2: O	ZigBee-PRO MM	SR1: M		X
				ZigBee-PRO	SR1: M		X
ALS10	Is this device capable of following the “network key update procedure” in the role of a network device?	[R1]/4.6.3.4, 4.6.3.4.2	O	ZigBee-PRO MM	FDT1: X FDT2: M FDT3: M		X
				ZigBee-PRO	FDT1: X FDT2: M FDT3: M		X
ALS11	Is this device capable of following the “network key recovery procedure” in the role of a trust center?		TCC1:O. 1 TCC2:O. 1	ZigBee-PRO MM	X	This item was deprecated.	<a href="#">Click here to enter text.</a>
				ZigBee-PRO	X		<a href="#">Click here to enter text.</a>
ALS12			O	ZigBee-PRO MM	X	This item was deprecated.	<a href="#">Click here to enter text.</a>

Item number	Item description	Reference	ZigBee Status	Feature set Support		Additional Constraints	Platform Support
	Is this device capable of following the "network key recovery procedure" in the role of a network device?			ZigBee-PRO	X		<a href="#">Click here to enter text.</a>
ALS13	Is this device capable of following the "end-to-end application key establishment procedure" in the role of a trust center?	[R1]/4.6.3.5, 4.6.3.5.2	TCC1: O TCC2: O	ZigBee-PRO MM	SR1: O	For ZigBee and ZigBee PRO Standard Security, it is optional for the trust center to perform the "end-to-end application key establishment" procedure. For ZigBee PRO High Security, it is mandatory.	<a href="#">Click here to enter text.</a>
				ZigBee-PRO	SR1: O		<a href="#">Click here to enter text.</a>
ALS14	Is this device capable of following the "end-to-end application key establishment procedure" in the role of a device receiving a master key for use with the SKKE protocol?	[R1]/4.6.3.5, 4.6.3.5.1, 4.6.3.5.1.2	O	ZigBee-PRO MM	O	For ZigBee and ZigBee PRO Standard Security and ZigBee PRO High Security, it is optional for the network devices to perform the "end-to-end application key establishment" procedure.	<a href="#">Click here to enter text.</a>
				ZigBee-PRO	O		<a href="#">Click here to enter text.</a>
ALS15	Is this device capable of following the "end-to-end application key establishment procedure" in the role of a device directly receiving a link key?	[R1]/4.6.3.5, 4.6.3.5.1, 4.6.3.5.1.1	O	ZigBee-PRO MM	O	For ZigBee and ZigBee PRO Standard Security and ZigBee PRO High Security, it is optional for the network devices to perform the "end-to-end application key establishment" procedure.	<a href="#">Click here to enter text.</a>
				ZigBee-PRO	O		<a href="#">Click here to enter text.</a>
ALS16	Is this device capable of following the "network leave procedure" in the role of a trust center?	[R1]/4.6.3.6, 4.6.3.6.1	TCC1: O TCC2: O	ZigBee-PRO MM	SR1: M		X
				ZigBee-PRO	SR1: M		X
ALS17	Is this device capable of following the "network leave procedure" in the role of a router?	[R1]/4.6.3.6, 4.6.3.6.2	FDT1:O, FDT2:O, FDT3:X	ZigBee-PRO MM	FDT1: X FDT2: M FDT3: X		X
				ZigBee-PRO	FDT1: X FDT2: M FDT3: X		X
ALS18		[R1]/4.6.3.6, 4.6.3.6.3	O	ZigBee-PRO MM	FDT1: X FDT2: M FDT3: M		X

Item number	Item description	Reference	ZigBee Status	Feature set Support		Additional Constraints	Platform Support
	Is this device capable of following the “network leave procedure” in the role of a leaving device?			ZigBee-PRO	FDT1: X FDT2: M FDT3: M		X
ALS19	Is this device capable of following the “intra-PAN portability procedure” in the role of a parent?	[R1]/4.6.3.3, 4.6.3.3.1	FDT1: O FDT2: O FDT3: X	ZigBee-PRO MM	FDT1: M FDT2: M FDT3: X		X
				ZigBee-PRO	FDT1: M FDT2: M FDT3: X		X
ALS20	Is this device capable of following the “intra-PAN portability procedure” in the role of an end device?	[R1]/4.6.3.3, 4.6.3.3.2	O	ZigBee-PRO MM	FDT1: X FDT2: X FDT3: M		X
				ZigBee-PRO	FDT1: X FDT2: X FDT3: M		X
ALS21	Is this device capable of following the “command tunneling procedure” in the role of a trust center device?	[R1]/4.6.3.8, 4.6.3.8.1	TCC1: O TCC2: O	ZigBee-PRO MM	SR1: O	For ZigBee PRO High Security, the command tunneling procedure in the role of a trust center device is mandatory. For ZigBee and ZigBee PRO Standard Security, it is optional.	Click here to enter text.
				ZigBee-PRO	SR1: O		Click here to enter text.
ALS22	Is this device capable of following the “command tunneling procedure” in the role of a router?	[R1]/4.6.3.8, 4.6.3.8.2	FDT1: O FDT2: O FDT3: X	ZigBee-PRO MM	FDT1: O FDT2: O FDT3: X	For ZigBee PRO High Security, the command tunneling procedure in the role of a router device is mandatory. For ZigBee and ZigBee PRO Standard Security, it is optional.	Click here to enter text.
				ZigBee-PRO	FDT1: O FDT2: O FDT3: X		Click here to enter text.
ALS23	Does the device support the permissions configuration table?	[R1]/4.2.3.8, 4.6.3.8	O	ZigBee-PRO MM	O	The Permissions Configuration Table is optional for all devices.	X
				ZigBee-PRO	O		X

576

577 **10.6 Application layer PICS**578 **10.6.1 ZigBee security device types**

Item number	Item description	Reference	ZigBee Status	Feature set Support		Additional Constraints	Platform Support
SDT1	Is this device capable of acting as a ZigBee Trust Center?	[R1]/4.2.4, 4.6.2	O.2	ZigBee PRO MM	FDT1: M FDT2: O FDT3: X	This item was deprecated in favor of SR1.	Click here to enter text.
				ZigBee-PRO	FDT1: M FDT2: O FDT3: X		Click here to enter text.
SDT2	Is this device capable of joining a secure ZigBee network only as a device?	[R1]/4.6.3	O.2	ZigBee PRO MM	FDT1: X FDT2: M FDT3: M		X
				ZigBee-PRO	FDT1: X FDT2: M FDT3: M		X

579

580 **10.6.2 ZigBee APS frame format**

Item number	Item description	Reference	ZigBee Status	Feature set Support		Additional Constraints	Platform Support
AFF1	Does the device support the general ZigBee APS frame format?	[R1]/2.2.5.1	M	ZigBee PRO MM	M		X
				ZigBee-PRO	M		X

Item number	Item description	Reference	ZigBee Status	Feature set Support		Additional Constraints	Platform Support
				ZigBee PRO MM	M		
AFF2	Does the device support the ZigBee APS data frame format?	[R1]/2.2.5.2.1	M	ZigBee PRO MM	M		X
				ZigBee-PRO	M		X
AFF3	Does the device support the ZigBee APS command frame format?	[R1]/2.2.5.2.2, 2.2.6	O	ZigBee PRO MM	M		X
				ZigBee-PRO	M		X
AFF4	Does the device support the ZigBee APS acknowledgement frame format?	[R1]/2.2.5.2.3	M	ZigBee PRO MM	M		X
				ZigBee-PRO	M		X

581

### 582 10.6.3 Major capabilities of the ZigBee application layer

583 *Tables in the following subclauses detail the capabilities of the APL layer for ZigBee devices.*

#### 584 10.6.3.1 Application layer functions

##### 585 10.6.3.1.1 Application Support Sub-layer functions

Item number	Item description	Reference	ZigBee Status	Feature set Support		Additional Constraints	Platform Support
				ZigBee PRO MM	M		
ALF1	Does the application support sub-layer support transmission of data by the next higher layer?	[R1]/2.2.4.1.1, 2.2.4.1.2	M	ZigBee PRO MM	M		X
				ZigBee-PRO	M		X

Item number	Item description	Reference	ZigBee Status	Feature set Support		Additional Constraints	Platform Support
ALF200	Does the device support transmission of outgoing APS frames within APSDE with the DstAddrMode set to 0x00 (indirect)	[R1]/2.2.4.1.1	O	ZigBee PRO MM	X	This must be handled by the application.	X
				ZigBee-PRO	X		X
ALF201	Does the device support transmission of outgoing APS frames within APSDE with the DstAddrMode set to 0x01 (group addressed)	[R1]/2.2.4.1.1	M	ZigBee PRO MM	M		X
				ZigBee-PRO	M		X
ALF202	Does the device support transmission of outgoing APS frames within APSDE with the DstAddrMode set to 0x02 (unicast using NWK address and Destination Endpoint)	[R1]/2.2.4.1.1	M	ZigBee PRO MM	M		X
				ZigBee-PRO	M		X
ALF203	Does the device support transmission of outgoing APS frames within APSDE with the DstAddrMode set to 0x03 (unicast using IEEE address and Destination Endpoint)	[R1]/2.2.4.1.1	O	ZigBee PRO MM	O		X
				ZigBee-PRO	O		X
ALF2	Does the application support sub-layer support reception of data by the next higher layer at the endpoint supplied by the incoming packet?	[R1]/2.2.4.1.3	M	ZigBee PRO MM	M		X
				ZigBee-PRO	M		X



Item number	Item description	Reference	ZigBee Status	Feature set Support		Additional Constraints	Platform Support
				ZigBee PRO MM	ZigBee-PRO		
ALF300	Does the device support reception of incoming APS frames within APSDE with the DstAddrMode set to 0x00 (indirect)	[R1]/2.2.4.1.3	O	ZigBee PRO MM	X		Click here to enter text.
				ZigBee-PRO	X		Click here to enter text.
ALF301	Does the device support reception of incoming APS frames within APSDE with the DstAddrMode set to 0x01 (group addressed)	[R1]/2.2.4.1.3	M	ZigBee PRO MM	M		X
				ZigBee-PRO	M		X
ALF302	Does the device support reception of incoming APS frames within APSDE with the DstAddrMode set to 0x02 (unicast using NWK address and Destination Endpoint)	[R1]/2.2.4.1.3	M	ZigBee PRO MM	M		X
				ZigBee-PRO	M		X
ALF3	Does the application support sub-layer support BIND and UNBIND requests and confirms?	[R1]/2.2.4.3.1, 2.2.4.3.2, 2.2.4.3.3, 2.2.4.3.4	O	ZigBee PRO MM	O	Binding support is optional for all devices, except that: <ul style="list-style-type: none"> <li>Source binding only is supported (coordinator based binding is disallowed)</li> <li>All devices shall minimally respond with NOT_IMPLEMENTED</li> </ul> The ZigBee Coordinator shall implement the mechanism for matching end device bind requests (AZD24; FDT1: M).	X
				ZigBee-PRO	O		X
ALF4		[R1]/2.2.4.4.1, 2.2.4.4.2	M	ZigBee PRO MM	M		X

Item number	Item description	Reference	ZigBee Status	Feature set Support		Additional Constraints	Platform Support
	Does the device's application support sub-layer offer the next higher layer the ability to get application information base (AIB) attributes.			ZigBee-PRO	M		X
ALF5	Does the device's application support sub-layer offer the next higher layer the ability to set application information base (AIB) attributes.	[R1]/2.2.4.4.3, 2.2.4.4.4	M	ZigBee PRO MM	M		X
				ZigBee-PRO	M		X
ALF100	Does the application support sub-layer support ADD GROUP requests and confirms?	[R1]/2.2.4.5.1, 2.2.4.5.2	M	ZigBee PRO MM	O	If supported, the group table in the APS shall contain a minimum of 16 group addresses.	Click here to enter text.
				ZigBee-PRO	O		Click here to enter text.
ALF101	Does the application support sub-layer support REMOVE GROUP requests and confirms?	[R1]/2.2.4.5.3, 2.2.4.5.4	M	ZigBee PRO MM	O		Click here to enter text.
				ZigBee-PRO	O		Click here to enter text.
ALF102	Does the application support sub-layer support REMOVE ALL GROUPS requests and confirms?	[R1]/2.2.4.5.5, 2.2.4.5.6	M	ZigBee PRO MM	O		Click here to enter text.
				ZigBee-PRO	O		Click here to enter text.

587 **10.6.3.1.2 Application layer frames**

Item number	Item description	Reference	ZigBee Status	Feature set Support		Additional Constraints	Platform Support
ADF1	Does the device support the origination of application data frames.	[R1]/2.2.5.1, 2.2.5.2.1, 2.2.8.4.1	M	ZigBee PRO MM	M		X
				ZigBee-PRO	M		X
ADF2	Does the device support the receipt of application data frames.	[R1]/2.2.5.1 2.2.5.2.1, 2.2.8.3.2, 2.2.8.3.3	M	ZigBee PRO MM	M		X
				ZigBee-PRO	M		X
ADF3	Does the device support the origination of application data frames with the auxiliary APS security header?	[R1]/ 2.2.5.1, 2.2.5.2.1, 2.2.8.4.1, 4.4.1.1	O	ZigBee PRO MM	O	Use of the auxiliary APS security header is optional for all devices. The application profiles shall determine requirements for use of the auxiliary APS security header.	Click here to enter text.
				ZigBee-PRO	O		Click here to enter text.
ADF4	Does the device support the receipt of application data frames with the auxiliary APS security header?	[R1]/ 2.2.5.1 2.2.5.2.1, 2.2.8.3.2, 2.2.8.3.3, 4.4.1.2	O	ZigBee PRO MM	O	Use of the auxiliary APS security header is optional for all devices. The application profiles shall determine requirements for use of the auxiliary APS security header.	Click here to enter text.
				ZigBee-PRO	O		Click here to enter text.
ADF5	Does the device support the origination of application data frames with the extended APS fragmentation/re-assembly header?	[R1]/ 2.2.5.1, 2.2.5.2.1, 2.2.8.4.1, 2.2.5.1.8, 2.2.8.4.5.1	O	ZigBee PRO MM	O	Use of the extended APS fragmentation/re-assembly header is optional, but in all cases the parameters shall be set by agreement within specific application profiles.	Click here to enter text.

Item number	Item description	Reference	ZigBee Status	Feature set Support		Additional Constraints	Platform Support
				ZigBee-PRO	O	Devices using the ZigBee and ZigBee-PRO feature sets shall set:  <i>Config_Max_ZDO-Payload = 0</i> (i.e. for compatibility with the earlier ZigBee feature set, ZDO messages shall not be fragmented)	<a href="#">Click here to enter text.</a>
ADF6	Does the device support the receipt of application data frames with the extended APS fragmentation/re-assembly header?	[R1]/ 2.2.5.1 2.2.5.2.1, 2.2.8.3.2, 2.2.8.3.3, 2.2.5.1.8, 2.2.8.4.5.2	O	ZigBee PRO MM	O	Use of the extended APS fragmentation/re-assembly header is optional, but in all cases the parameters shall be set by agreement within specific application profiles.  Devices using the ZigBee and ZigBee-PRO feature sets shall set:  <i>Config_Max_ZDO-Payload = 0</i> (i.e. for compatibility with the earlier ZigBee feature set, ZDO messages shall not be fragmented)	<a href="#">Click here to enter text.</a>
				ZigBee-PRO	O		<a href="#">Click here to enter text.</a>

588 10.6.3.1.3 Application layer command frames

Item number	Item description	Reference	ZigBee Status	Feature set Support		Additional Constraints	Platform Support
ACF500	Does the device support the origination of command frames with the auxiliary APS security header?	[R1]/ 2.2.5.1, 2.2.5.2.2, 2.2.6, 4.4.1.1	O	ZigBee PRO MM	O		<a href="#">Click here to enter text.</a>
				ZigBee-PRO	O		<a href="#">Click here to enter text.</a>
ACF501	Does the device support the receipt of command frames with the auxiliary APS security header?	[R1]/ 2.2.5.1 2.2.5.2.1, 2.2.6, 2.2.8.3.3, 4.4.1.2	O	ZigBee PRO MM	O		<a href="#">Click here to enter text.</a>
				ZigBee-PRO	O		<a href="#">Click here to enter text.</a>

Item number	Item description	Reference	ZigBee Status	Feature set Support		Additional Constraints	Platform Support
ACF1	Does the device support the origination of application command frames from the Trust Center.	[R1]/4.4.9, 4.6.2, 4.6.3.2, 4.6.3.3, 4.6.3.4, 4.6.3.5, 4.6.3.6, 4.6.3.7	SDT1: M	ZigBee PRO MM	SR1: M		X
				ZigBee-PRO	SR1: M		X
ACF100	Does the device support the origination of Key Establishment application command frames from the Trust Center?	[R1]/4.4.9.1	SDT1:M	ZigBee PRO MM	SR1: O	In ZigBee and ZigBee PRO Standard Security Mode, it is optional to originate Key Establishment command frames from the Trust Center. In ZigBee PRO High Security, it is mandatory.	Click here to enter text.
				ZigBee-PRO	SR1: O		Click here to enter text.
ACF101	Does the device support the origination of Transport Key application command frames from the Trust Center?	[R1]/4.4.9.2	SDT1:M	ZigBee PRO MM	SR1: M	In ZigBee and ZigBee PRO Standard Security Mode, it is mandatory to originate Transport Key command frames from the Trust Center for Key Type 1 (Network Key Standard Mode). In ZigBee PRO High Security Mode, it is mandatory to originate Transport Key command frames from the Trust Center for Key Type 0 (Trust Center Master Key) and Key Type 5 (Network Key High Security Mode). It is optional in either ZigBee and ZigBee PRO Standard Security or High Security to originate Transport Key command frames for Key Types 4 (Trust Center Link Key), Key Type 2 (Application Master Key) and Key Type 3 (Application Link Key).	X
				ZigBee-PRO	SR1: M		X

Item number	Item description	Reference	ZigBee Status	Feature set Support		Additional Constraints	Platform Support
				ZigBee PRO MM	SR1: M		
ACF102	Does the device support the origination of Remove Device application command frames from the Trust Center?	[R1]/4.4.9.4	SDT1:M	ZigBee PRO MM	SR1: M		X
				ZigBee-PRO	SR1: M		X
ACF103	Does the device support the origination of Switch Key application command frames from the Trust Center?	[R1]/4.4.9.6	SDT1:M	ZigBee PRO MM	SR1: M		X
				ZigBee-PRO	SR1: M		X
ACF104	Does the device support the origination of entity authentication application command frames?	[R1]/4.4.9.7	SDT1:M	ZigBee PRO MM	SR1: O		X
				ZigBee-PRO	MOO2: O MOO1: M		X
ACF2	Does the device support the receipt of application command frames at the Trust Center	[R1]/4.4.9, 4.6.2, 4.6.3.2, 4.6.3.3, 4.6.3.4, 4.6.3.5, 4.6.3.6, 4.6.3.7	SDT1:M	ZigBee PRO MM	SR1: M	Mandatory for the trust centre and optional for other devices.	X
				ZigBee-PRO	SR1: M		X
ACF200	Does the device support the receipt of Key Establishment application command frames at the Trust Center?	[R1]/4.4.9.1	SDT1:M	ZigBee PRO MM	SR1: O	In ZigBee and ZigBee PRO Standard Security Mode, it is optional to receive Key Establishment command frames from the Trust Center. In ZigBee PRO High Security, it is mandatory.	Click here to enter text.
				ZigBee-PRO	SR1: O		Click here to enter text.

Item number	Item description	Reference	ZigBee Status	Feature set Support		Additional Constraints	Platform Support
ACF201	Does the device support the receipt of Transport Key application command frames at the Trust Center?	[R1]/4.4.9.2	SDT1:M	ZigBee PRO MM	SR1: M	In ZigBee and ZigBee PRO Standard Security Mode, it is mandatory to receive Transport Key command frames from the Trust Center for Key Type 1 (Network Key Standard Mode). In ZigBee PRO High Security Mode, it is mandatory to receive Transport Key command frames from the Trust Center for Key Type 0 (Trust Center Master Key) and Key Type 5 (Network Key High Security Mode). It is optional in ZigBee and ZigBee PRO Standard Security to receive Transport Key command frames for Key Types 4 (Trust Center Link Key), Key Type 2 (Application Master Key) and Key Type 3 (Application Link Key). It is prohibited in ZigBee PRO High Security to receive Transport Key command frames for Key Types 4 (Trust Center Link Key) and optional to receive Transport Key command frames for Key Type 2 (Application Master Key) and Key Type 3 (Application Link Key).	X
				ZigBee-PRO	SR1: M		X
ACF202	Does the device support the receipt of Update Device application command frames at the Trust Center?	[R1]/4.4.9.3	SDT1:M	ZigBee PRO MM	SR1: M		X
				ZigBee-PRO	SR1: M		X
ACF203	Does the device support the receipt of Request Key application command frames at the Trust Center?	[R1]/4.4.9.5	SDT1:M	ZigBee PRO MM	SR1: M		X
				ZigBee-PRO	SR1: M		X

Item number	Item description	Reference	ZigBee Status	Feature set Support		Additional Constraints	Platform Support
				ZigBee PRO MM	ZigBee PRO		
ACF204	Does the device support the receipt of entity authentication application command frames?	[R1]/4.4.9.7	SDT1:M	ZigBee PRO MM	X		Click here to enter text.
				ZigBee PRO	MOO1: M MOO2: O		X
ACF3	Does the device support the origination of application command frames from a non-Trust Center device.	[R1]/4.4.9, 4.6.3	SDT2:M	ZigBee PRO MM	FDT1: X FDT2: M FDT3: O	In ZigBee and ZigBee PRO Standard Security, non Trust Center devices may optionally originate application command frames. In ZigBee PRO High Security, all non Trust Center routers and the coordinator shall originate application command frames and end devices may originate application command frames.	X
				ZigBee PRO	MOO1: FDT1: X FDT2: M FDT3: M MOO2: FDT1: X FDT2: M FDT3: O		X
ACF300	Does the device support the origination of Key Establishment application command frames from a non-Trust Center device?	[R1]/4.4.9.1, 4.6.3.5	SDT2:M	ZigBee PRO MM	O	In ZigBee and ZigBee PRO Standard Security, it is optional for all devices to support origination of Key Establishment command frames from a non Trust Center device. In ZigBee PRO High Security, it is mandatory for all devices to support origination of Key Establishment command frames from a non Trust Center device.	Click here to enter text.
				ZigBee PRO	O		Click here to enter text.
ACF301	Does the device support the origination of Transport Key application command frames from a non-Trust Center device?	[R1]/4.4.9.2	SDT2:M	ZigBee PRO MM	O		X
				ZigBee PRO	O		X
ACF302	Does the device support the origination of Update Device application command frames from a non-Trust Center device?	[R1]/4.4.9.3, 4.6.3.4	SDT2:M	ZigBee PRO MM	FDT1: M FDT2: M FDT3: O	Assumes it is legal to have the Trust Center on a non-ZigBee Coordinator device for the ZigBee feature set via ZigBee-2007	X
				ZigBee PRO	FDT1: M FDT2: M FDT3: O		X



Item number	Item description	Reference	ZigBee Status	Feature set Support		Additional Constraints	Platform Support
ACF303	Does the device support the origination of Request Key application command frames from a non-Trust Center device?	[R1]/4.4.9.5	SDT2:M	ZigBee PRO MM	O		X
				ZigBee-PRO	O		X
ACF304	Does the device support the origination of Authenticate application command frames from a non-Trust Center device?	[R1]/4.4.9.7, 4.6.3.2	SDT2:M	ZigBee PRO MM	O		Click here to enter text.
				ZigBee-PRO	O		Click here to enter text.
ACF4	Does the device support the receipt of application command frames from a non-Trust Center device.	[R1]/4.4.9, 4.6.3	SDT1:M, SDT2:M	ZigBee PRO MM	SR1: M FDT1: M FDT2: M FDT3: O	In all ZigBee and ZigBee PRO security modes, the Trust Center shall receive application command frames from non Trust Center devices. In ZigBee and ZigBee PRO Standard Security, all non Trust Center routers and the coordinator shall receive application command frames. In ZigBee PRO High Security, all non Trust Center devices shall receive application command frames.	X
				ZigBee-PRO	SR1: M FDT1: M FDT2: M FDT3: O		X
ACF400	Does the device support the receipt of Key Establishment application command frames from a non-Trust Center device?	[R1]/4.4.9.1, 4.6.3.5	SDT1:M, SDT2:M	ZigBee PRO MM	O	For all devices in ZigBee PRO Standard Security, receipt of Key Establishment application command frames from a non Trust Center device is optional. In ZigBee PRO High Security, receipt of Key Establishment application command frames from non Trust Center devices is mandatory in all devices.	Click here to enter text.
				ZigBee-PRO	O		Click here to enter text.

Item number	Item description	Reference	ZigBee Status	Feature set Support		Additional Constraints	Platform Support
				ZigBee PRO MM	ZigBee PRO		
ACF401	Does the device support the receipt of Transport Key application command frames from a non-Trust Center device?	[R1]/4.4.9.2	SDT1:M, SDT2:M	ZigBee PRO MM	SR1: M SDT2: M		X
				ZigBee-PRO	SR1: M SDT2: M		X
ACF402	Does the device support the receipt of Update Device application command frames from a non-Trust Center device?	[R1]/4.4.9.3, 4.6.3.4	SDT1:M	ZigBee PRO MM	SR1: M		X
				ZigBee-PRO	SR1: M		X
ACF403	Does the device support the receipt of Request Key application command frames from a non-Trust Center device?	[R1]/4.4.9.5	SDT1:M	ZigBee PRO MM	SR1: M		X
				ZigBee-PRO	SR1: M		X
ACF404	Does the device support the receipt of entity authenticate application command frames from a non-Trust Center device?	[R1]/4.4.9.7, 4.6.3.2	SDT1:M SDT2:M	ZigBee PRO MM	O	Need a comment that this feature is optional in ZigBee and ZigBee PRO Standard Security and mandatory for all devices in ZigBee PRO High Security.	Click here to enter text.
				ZigBee-PRO	O		Click here to enter text.
ACF405 <sup>11</sup>	Does the device support the receipt of a Transport Key message APS encrypted with the default TC link key?	[R1]/4.2.1.3	FDT1: X FDT2: M FDT3: M	ZigBee PRO MM	X		X
				ZigBee-PRO	SDT1:X SDT2:M		X

589

<sup>11</sup> CCB 1039

ACF406 <sup>12</sup>	Does the device support the transmission of a Transport Key message APS encrypted with the default TC link key?	[R1]/4.2.1.3	FDT1:M FDT2:X FDT3:X	ZigBee PRO MM	X	X
				ZigBee-PRO	SDT1:M SDT2:X	X

590 **10.6.3.1.4 Application acknowledgement frames**

Item number	Item description	Reference	ZigBee Status	Feature set Support		Additional Constraints	Platform Support
AFR1	Does the device support the origination of application acknowledgement frames.	[R1]/2.2.8.3.1, 2.2.8.3.3	M	ZigBee PRO MM	M		X
				ZigBee-PRO	M		X
AFR2	Does the device support the receipt of application acknowledgement frames?	[R1]/2.2.8.3.2, 2.2.8.3.3	M	ZigBee PRO MM	M		X
				ZigBee-PRO	M		X

591 **10.6.3.1.5 ZigBee Device Objects functions**

Item number	Item description	Reference	ZigBee Status	Feature set Support		Additional Constraints	Platform Support
AZD700	Does the device support the permissions configuration table?	[R1]/4.6.3.8	O	ZigBee PRO MM	O		X
				ZigBee-PRO	O		X
AZD701		[R1]/4.6.3.8	AZD700: O	ZigBee PRO MM	AZD700: O		Click here to enter text.

<sup>12</sup> CCB 1039

Item number	Item description	Reference	ZigBee Status	Feature set Support		Additional Constraints	Platform Support
	Does the device support the ModifyPermissionsCapabilityTable element of the permissions configuration table?			ZigBee-PRO	AZD700: O		Click here to enter text.
AZD702	Does the device support the NetworkSettings element of the permissions configuration table?	[R1]/4.6.3.8	AZD700: O	ZigBee-PRO MM	AZD700: O		Click here to enter text.
				ZigBee-PRO	AZD700: O		Click here to enter text.
AZD703	Does the device support the Application-Settings element of the permissions configuration table?	[R1]/4.6.3.8	AZD700: O	ZigBee-PRO MM	AZD700: O		X
				ZigBee-PRO	AZD700: O		X
AZD704	Does the device support the SecuritySettings element of the permissions configuration table?	[R1]/4.6.3.8	AZD700: O	ZigBee-PRO MM	AZD700: O		X
				ZigBee-PRO	AZD700: O		X
AZD705	Does the device support the Application-Commands element of the permissions configuration table?	[R1]/4.6.3.8	AZD700: O	ZigBee-PRO MM	AZD700: O		X
				ZigBee-PRO	AZD700: O		X
AZD706		[R1]/4.6.3.8	AZD700: O	ZigBee-PRO MM	AZD700: O		Click here to enter text.

Item number	Item description	Reference	ZigBee Status	Feature set Support		Additional Constraints	Platform Support
	Does the device support the SKKEWith-MasterKey element of the permissions configuration table?			ZigBee-PRO	AZD700: O		Click here to enter text.
AZD707	Does the device support the NWK rejoin procedure?	[R1]/3.6.1.4.2	M	ZigBee PRO MM	M	Support of the rejoin mechanism for recovering from a missed network update (of any kind) is mandatory ([R1] Section 2.5.5.5.4).  The length of time between hearing from its parent, or from the ZigBee coordinator, beyond which a ZigBee router shall initiate steps to rejoin the “fragment” of the network which has the ZigBee coordinator in it, is left up to the application designer.	X
				ZigBee-PRO	M		X
AZD600	Does the device act as a Binding Table Cache?	[R1]/2.5.5.5.3	FDT1: O FDT2: O FDT3: X	ZigBee PRO MM	FDT1: O FDT2: O FDT3: X		Click here to enter text.
				ZigBee-PRO	FDT1: O FDT2: O FDT3: X		Click here to enter text.
AZD601	Does the device perform the Intra-PAN portability parent procedure?	[R1]/2.5.5.5.4	FDT1: M FDT2: M FDT3: X	ZigBee PRO MM	FDT1: M FDT2: M FDT3: X		X
				ZigBee-PRO	FDT1: M FDT2: M FDT3: X		X
AZD602	Does the device perform the Intra-PAN portability child procedure?	[R1]/2.5.5.5.4	FDT1: X FDT2: X FDT3: M	ZigBee PRO MM	FDT1: X FDT2: X FDT3: M		X
				ZigBee-PRO	FDT1: X FDT2: X FDT3: M		X

Item number	Item description	Reference	ZigBee Status	Feature set Support		Additional Constraints	Platform Support
AZD603	Does the device support the Configuration Parameters, Startup Procedures and Additional Configuration Parameters?	[R1]/2.5.5.5.6.1, 2.5.5.5.6.2, 2.5.5.5.6.3	O	ZigBee PRO MM	O	For the ChannelMask parameter, in the 2.4 Ghz band, channel 26 shall either not be used or else a special provision for limited transmission power shall be imposed to permit U.S. FCC operations.	X
				ZigBee-PRO	M		X
AZD1	Does the device support the mandatory Device and Service Discovery Object?	[R1]/2.5.5.6.1	M	ZigBee PRO MM	M		X
				ZigBee-PRO	M		X
AZD2	Does the device support the mandatory attributes of the Device and Service Discovery Object?	[R1]/2.5.5.6.1	M	ZigBee PRO MM	M		X
				ZigBee-PRO	M		X
AZD3	Does the device support the optional attributes of the Device and Service Discovery Object?	[R1]/2.5.5.6.1	O	ZigBee PRO MM	O		Click here to enter text.
				ZigBee-PRO	O		Click here to enter text.
AZD4	Does the device support the optional NWK address client service of the Device and Service Discovery Object?	[R1]/2.5.5.6.1	AZD3: O	ZigBee PRO MM	AZD3: O		X
				ZigBee-PRO	AZD3: O		X

Item number	Item description	Reference	ZigBee Status	Feature set Support		Additional Constraints	Platform Support
AZD5	Does the device support the optional IEEE address client service of the Device and Service Discovery Object?	[R1]/2.5.5.6.1	AZD3: O	ZigBee PRO MM	AZD3: O		X
				ZigBee-PRO	AZD3: O		X
AZD6	Does the device support the optional Node Descriptor client service of the Device and Service Discovery Object?	[R1]/2.5.5.6.1	AZD3: O	ZigBee PRO MM	AZD3: O		X
				ZigBee-PRO	AZD3: O		X
AZD7	Does the device support the optional Power Descriptor client service of the Device and Service Discovery Object?	[R1]/2.5.5.6.1	AZD3: O	ZigBee PRO MM	AZD3: O		X
				ZigBee-PRO	AZD3: O		X
AZD8	Does the device support the optional Simple Descriptor client service of the Device and Service Discovery Object?	[R1]/2.5.5.6.1	AZD3: O	ZigBee PRO MM	AZD3: O		X
				ZigBee-PRO	AZD3: O		X
AZD9	Does the device support the optional Active Endpoint client service of the Device and Service Discovery Object?	[R1]/2.5.5.6.1	AZD3: O	ZigBee PRO MM	AZD3: O		X
				ZigBee-PRO	AZD3: O		X

Item number	Item description	Reference	ZigBee Status	Feature set Support		Additional Constraints	Platform Support
AZD10	Does the device support the optional Match Descriptor client service of the Device and Service Discovery Object?	[R1]/2.5.5.6.1	AZD3: O	ZigBee PRO MM	AZD3: O		X
				ZigBee-PRO	AZD3: O		X
AZD11	Does the device support the optional Complex Descriptor client service of the Device and Service Discovery Object?	[R1]/2.5.5.6.1	AZD3: O	ZigBee PRO MM	AZD3: O		X
				ZigBee-PRO	AZD3: O		X
AZD12	Does the device support the optional Complex Descriptor server service of the Device and Service Discovery Object?	[R1]/2.5.5.6.1	AZD3: O	ZigBee PRO MM	AZD3: O		Click here to enter text.
				ZigBee-PRO	AZD3: O		Click here to enter text.
AZD13	Does the device support the optional User Descriptor client service of the Device and Service Discovery Object?	[R1]/2.5.5.6.1	AZD3: O	ZigBee PRO MM	AZD3: O		X
				ZigBee-PRO	AZD3: O		X
AZD14	Does the device support the optional User Descriptor server service of the Device and Service Discovery Object?	[R1]/2.5.5.6.1	AZD3: O	ZigBee PRO MM	AZD3: O		Click here to enter text.
				ZigBee-PRO	AZD3: O		Click here to enter text.



Item number	Item description	Reference	ZigBee Status	Feature set Support		Additional Constraints	Platform Support
				ZigBee PRO MM	M		
AZD17	Does the device support the mandatory Device Announce client service of the Device and Service Discovery Object?	[R1]/2.5.5.6.1	AZD1: M	ZigBee PRO MM	M		X
				ZigBee-PRO	M		X
AZD18	Does the device support the Device Announce server service of the Device and Service Discovery Object?	[R1]/2.5.5.6.1	AZD1: M	ZigBee PRO MM	M		X
				ZigBee-PRO	M		X
AZD19	Does the device support the mandatory Security Manager Object? (CCB 2240)	[R1]/2.1.3, 2.5.2.3	M (for all R22 devices not on GP) (CCB 2240)	ZigBee PRO MM	NS	Green Power not supported on Sub GHz network	X
				ZigBee-PRO	M		X
AZD100	Does the device support the optional System Server Discovery client service of the Device and Service Discovery Object?	[R1]/2.5.5.6.1	AZD3: O	ZigBee PRO MM	AZD3: O		X
				ZigBee-PRO	AZD3: O		X
AZD101	Does the device support the optional System Server Discovery server service of the Device and Service Discovery Object?	[R1]/2.5.5.6.1	AZD3: O	ZigBee PRO MM	AZD3: O		X
				ZigBee-PRO	SR1: M		X
AZD102		[R1]/2.5.5.6.1	AZD3: O	ZigBee PRO MM	AZD3: O		Click here to enter text.

Item number	Item description	Reference	ZigBee Status	Feature set Support		Additional Constraints	Platform Support
	Does the device support the optional Discovery Cache client service of the Device and Service Discovery Object?			ZigBee-PRO	AZD3: O		Click here to enter text.
AZD103	Does the device support the optional Discovery Cache server service of the Device and Service Discovery Object?	[R1]/2.5.5.6.1	AZD3: O	ZigBee PRO MM	AZD3: FDT1: O FDT2: O FDT3: X		Click here to enter text.
				ZigBee-PRO	AZD3: FDT1: O FDT2: O FDT3: X		Click here to enter text.
AZD104	Does the device support the optional Discovery Store client service of the Device and Service Discovery Object?	[R1]/2.5.5.6.1	AZD3: O	ZigBee PRO MM	AZD3: O		Click here to enter text.
				ZigBee-PRO	AZD3: O		Click here to enter text.
AZD105	Does the device support the optional Discovery Store server service of the Device and Service Discovery Object?	[R1]/2.5.5.6.1	AZD103: M	ZigBee PRO MM	AZD103: M		X
				ZigBee-PRO	AZD103: M		X
AZD106	Does the device support the optional Node Descriptor Store client service of the Device and Service Discovery Object?	[R1]/2.5.5.6.1	AZD3: O	ZigBee PRO MM	AZD3: O		Click here to enter text.
				ZigBee-PRO	AZD3: O		Click here to enter text.
AZD107		[R1]/2.5.5.6.1	AZD103: M	ZigBee PRO MM	AZD103: M		Click here to enter text.

Item number	Item description	Reference	ZigBee Status	Feature set Support		Additional Constraints	Platform Support
	Does the device support the optional Node Descriptor Store server service of the Device and Service Discovery Object?			ZigBee-PRO	AZD103: M		X
AZD108	Does the device support the optional Power Descriptor Store client service of the Device and Service Discovery Object?	[R1]/2.5.5.6.1	AZD3: O	ZigBee PRO MM	AZD3: O		Click here to enter text.
				ZigBee-PRO	AZD3: O		Click here to enter text.
AZD109	Does the device support the optional Power Descriptor Store server service of the Device and Service Discovery Object?	[R1]/2.5.5.6.1	AZD103: M	ZigBee PRO MM	AZD103: M		X
				ZigBee-PRO	AZD103: M		X
AZD110	Does the device support the optional Active Endpoint Store client service of the Device and Service Discovery Object?	[R1]/2.5.5.6.1	AZD3: O	ZigBee PRO MM	AZD3: O		Click here to enter text.
				ZigBee-PRO	AZD3: O		Click here to enter text.
AZD111	Does the device support the optional Active Endpoint Store server service of the Device and Service Discovery Object?	[R1]/2.5.5.6.1	AZD103: M	ZigBee PRO MM	AZD103: M		X
				ZigBee-PRO	AZD103: M		X
AZD112		[R1]/2.5.5.6.1	AZD3: O	ZigBee PRO MM	AZD3: O		Click here to enter text.

Item number	Item description	Reference	ZigBee Status	Feature set Support		Additional Constraints	Platform Support
	Does the device support the optional Simple Descriptor Store client service of the Device and Service Discovery Object?			ZigBee-PRO	AZD3: O		Click here to enter text.
AZD113	Does the device support the optional Simple Descriptor Store server service of the Device and Service Discovery Object?	[R1]/2.5.5.6.1	AZD103: M	ZigBee PRO MM	AZD103: M		X
				ZigBee-PRO	AZD103: M		X
AZD114	Does the device support the optional Remove Node Cache client service of the Device and Service Discovery Object?	[R1]/2.5.5.6.1	AZD3: O	ZigBee PRO MM	AZD3: O		Click here to enter text.
				ZigBee-PRO	AZD3: O		Click here to enter text.
AZD115	Does the device support the optional Remove Node Cache server service of the Device and Service Discovery Object?	[R1]/2.5.5.6.1	AZD103: M	ZigBee PRO MM	AZD103: M		X
				ZigBee-PRO	AZD103: M		X
AZD116	Does the device support the optional Find Node Cache client service of the Device and Service Discovery Object?	[R1]/2.5.5.6.1	AZD3: O	ZigBee PRO MM	AZD3: O		Click here to enter text.
				ZigBee-PRO	AZD3: O		Click here to enter text.
AZD117		[R1]/2.5.5.6.1	AZD103: M	ZigBee PRO MM	AZD103: M		Click here to enter text.

Item number	Item description	Reference	ZigBee Status	Feature set Support		Additional Constraints	Platform Support
	Does the device support the optional Find Node Cache server service of the Device and Service Discovery Object?			ZigBee-PRO	AZD103: M		X
AZD650	Does the device support the optional Extended Simple Descriptor client service of the Device and Service Discovery Object?	[R1]/2.5.5.6.1	AZD3: O	ZigBee PRO MM	AZD3: O		Click here to enter text.
				ZigBee-PRO	AZD3: O		Click here to enter text.
AZD651	Does the device support the optional Extended Simple Descriptor server service of the Device and Service Discovery Object?	[R1]/2.5.5.6.1	AZD103: M	ZigBee PRO MM	AZD103: M		X
				ZigBee-PRO	AZD103: M		X
AZD652	Does the device support the optional Extended Active Endpoint client service of the Device and Service Discovery Object?	[R1]/2.5.5.6.1	AZD3: O	ZigBee PRO MM	AZD3: O		Click here to enter text.
				ZigBee-PRO	AZD3: O		Click here to enter text.
AZD653	Does the device support the optional Extended Active Endpoint server service of the Device and Service Discovery Object?	[R1]/2.5.5.6.1	AZD103: M	ZigBee PRO MM	AZD103: M		X
				ZigBee-PRO	AZD103: M		X
AZD19		[R1]/2.1.3, 2.5.2.3		ZigBee PRO MM	NS	Green Power not supported on Sub GHz network	Click here to enter text.

Item number	Item description	Reference	ZigBee Status	Feature set Support		Additional Constraints	Platform Support
	Does the device support the mandatory Security Manager Object? (CCB 2240)		M (for all R22 devices not on GP) (CCB 2240)	ZigBee-PRO	M		X
AZD20	Does the device support the mandatory attributes of the Security Manager Object with the device in a Trust Center role?	[R1]/2.5.5.7.1	AZD19: SDT1: M	ZigBee-PRO MM	SR1: M		X
				ZigBee-PRO	SR1: M		X
AZD21	Does the device support the mandatory attributes of the Security Manager Object with the device in a non-Trust Center role?	[R1]/2.5.5.7.1	AZD19: SDT2: M	ZigBee-PRO MM	SDT2: M		X
				ZigBee-PRO	SDT2: M		X
AZD22	Does the device support the optional Binding Manager Object?	[R1]/2.5.5.8.1	O	ZigBee-PRO MM	FDT1: M FDT2: O FDT3: O	End_Device_Bind_req server processing in the coordinator is required.	X
				ZigBee-PRO	FDT1: M FDT2: O FDT3: O	The ZigBee coordinator must process end device bind requests and supply Bind_req commands to the source of matched clusters in the paired end device bind requests.	X
AZD23	Does the device support the optional End Device Bind client service of the Binding Manager Object?	[R1]/2.5.5.8.1 [R1]/2.4.3.2.1	AZD22: FDT1: O FDT2: O FDT3: O	ZigBee-PRO MM	AZD22: FDT1: O FDT2: O FDT3: O		Click here to enter text.
				ZigBee-PRO	AZD22: FDT1: O FDT2: O FDT3: O		Click here to enter text.
AZD24		[R1]/2.5.5.8.1 [R1]/2.4.4.2.1	AZD22: FDT1: M FDT2: X FDT3: X	ZigBee-PRO MM	AZD22: FDT1: M FDT2: X FDT3: X		X

Item number	Item description	Reference	ZigBee Status	Feature set Support		Additional Constraints	Platform Support
	Does the device support the optional End Device Bind server service of the Binding Manager Object?			ZigBee-PRO	AZD22: FDT1: M FDT2: X FDT3: X		X
AZD25	Does the device support the optional Bind client service of the Binding Manager Object?	[R1]/2.5.5.8.1 [R1]/2.4.3.2.2	AZD22: FDT1: O FDT2: O FDT3: O	ZigBee PRO MM	AZD22: FDT1: O FDT2: O FDT3: O		Click here to enter text.
				ZigBee-PRO	AZD22: FDT1: O FDT2: O FDT3: O		Click here to enter text.
AZD26	Does the device support the optional Bind server service of the Binding Manager Object?	[R1]/2.5.5.8.1 [R1]/2.4.4.2.2	AZD22: FDT1: O FDT2: O FDT3: O	ZigBee PRO MM	AZD22: FDT1: O FDT2: O FDT3: O		Click here to enter text.
				ZigBee-PRO	AZD22: FDT1: O FDT2: O FDT3: O		Click here to enter text.
AZD27	Does the device support the optional Unbind client service of the Binding Manager Object?	[R1]/2.5.5.8.1 [R1]/2.4.3.2.3	AZD22: FDT1: O FDT2: O FDT3: O	ZigBee PRO MM	AZD22: FDT1: O FDT2: O FDT3: O		Click here to enter text.
				ZigBee-PRO	AZD22: FDT1: O FDT2: O FDT3: O		Click here to enter text.
AZD28	Does the device support the optional Unbind server service of the Binding Manager Object?	[R1]/2.5.5.8.1 [R1]/2.4.4.2.3	AZD22: FDT1: O FDT2: O FDT3: O	ZigBee PRO MM	AZD22: FDT1: O FDT2: O FDT3: O		Click here to enter text.
				ZigBee-PRO	AZD22: FDT1: O FDT2: O FDT3: O		Click here to enter text.
AZD200		[R1]/2.5.5.8.1 [R1]/2.4.3.2.4	AZD22: FDT1: O FDT2: O FDT3: O	ZigBee PRO MM	AZD22: FDT1: O FDT2: O FDT3: O		Click here to enter text.

Item number	Item description	Reference	ZigBee Status	Feature set Support		Additional Constraints	Platform Support
	Does the device support the optional Bind Register client service of the Binding Manager Object?			ZigBee-PRO	AZD22: FDT1: O FDT2: O FDT3: O		Click here to enter text.
AZD201	Does the device support the optional Bind Register server service of the Binding Manager Object?	[R1]/2.5.5.8.1 [R1]/2.4.4.2.4	AZD22: FDT1: O FDT2: O FDT3: O	ZigBee-PRO MM	AZD22: FDT1: O FDT2: O FDT3: O		Click here to enter text.
				ZigBee-PRO	AZD22: FDT1: O FDT2: O FDT3: O		Click here to enter text.
AZD202	Does the device support the optional Replace Device client service of the Binding Manager Object?	[R1]/2.5.5.8.1 [R1]/2.4.3.2.5	AZD22: FDT1: O FDT2: O FDT3: O	ZigBee-PRO MM	AZD22: FDT1: O FDT2: O FDT3: O		Click here to enter text.
				ZigBee-PRO	AZD22: FDT1: O FDT2: O FDT3: O		Click here to enter text.
AZD203	Does the device support the optional Replace Device server service of the Binding Manager Object?	[R1]/2.5.5.8.1 [R1]/2.4.4.2.5	AZD22: FDT1: O FDT2: O FDT3: O	ZigBee-PRO MM	AZD22: FDT1: O FDT2: O FDT3: O		Click here to enter text.
				ZigBee-PRO	AZD22: FDT1: O FDT2: O FDT3: O		Click here to enter text.
AZD204	Does the device support the optional Store Backup Bind Entry client service of the Binding Manager Object?	[R1]/2.5.5.8.1 [R1]/2.4.3.2.6	AZD22: FDT1: O FDT2: O FDT3: O	ZigBee-PRO MM	AZD22: FDT1: O FDT2: O FDT3: O		Click here to enter text.
				ZigBee-PRO	AZD22: FDT1: O FDT2: O FDT3: O		Click here to enter text.
AZD205		[R1]/2.5.5.8.1 [R1]/2.4.4.2.6	AZD22: FDT1: O FDT2: O FDT3: O	ZigBee-PRO MM	AZD22: FDT1: O FDT2: O FDT3: O		Click here to enter text.



Item number	Item description	Reference	ZigBee Status	Feature set Support		Additional Constraints	Platform Support
	Does the device support the optional Store Backup Bind Entry server service of the Binding Manager Object?			ZigBee-PRO	AZD22: FDT1: O FDT2: O FDT3: O		Click here to enter text.
AZD206	Does the device support the optional Remove Backup Bind Entry client service of the Binding Manager Object?	[R1]/2.5.5.8.1 [R1]/2.4.3.2.7	AZD22: FDT1: O FDT2: O FDT3: O	ZigBee PRO MM	AZD22: FDT1: O FDT2: O FDT3: O		Click here to enter text.
				ZigBee-PRO	AZD22: FDT1: O FDT2: O FDT3: O		Click here to enter text.
AZD207	Does the device support the optional Remove Backup Bind Entry server service of the Binding Manager Object?	[R1]/2.5.5.8.1 [R1]/2.4.4.2.7	AZD22: FDT1: O FDT2: O FDT3: O	ZigBee PRO MM	AZD22: FDT1: O FDT2: O FDT3: O		Click here to enter text.
				ZigBee-PRO	AZD22: FDT1: O FDT2: O FDT3: O		Click here to enter text.
AZD208	Does the device support the optional Backup Bind Table client service of the Binding Manager Object?	[R1]/2.5.5.8.1 [R1]/2.4.3.2.8	AZD22: FDT1: O FDT2: O FDT3: O	ZigBee PRO MM	AZD22: FDT1: O FDT2: O FDT3: O		Click here to enter text.
				ZigBee-PRO	AZD22: FDT1: O FDT2: O FDT3: O		Click here to enter text.
AZD209	Does the device support the optional Backup Bind Table server service of the Binding Manager Object?	[R1]/2.5.5.8.1 [R1]/2.4.4.2.8	AZD22: FDT1: O FDT2: O FDT3: O	ZigBee PRO MM	AZD22: FDT1: O FDT2: O FDT3: O		Click here to enter text.
				ZigBee-PRO	AZD22: FDT1: O FDT2: O FDT3: O		Click here to enter text.
AZD210		[R1]/2.5.5.8.1 [R1]/2.4.3.2.9	AZD22: FDT1: O FDT2: O FDT3: O	ZigBee PRO MM	AZD22: FDT1: O FDT2: O FDT3: O		Click here to enter text.

Item number	Item description	Reference	ZigBee Status	Feature set Support		Additional Constraints	Platform Support
	Does the device support the optional Recover Bind Table client service of the Binding Manager Object?			ZigBee-PRO	AZD22: FDT1: O FDT2: O FDT3: O		Click here to enter text.
AZD211	Does the device support the optional Recover Bind Table server service of the Binding Manager Object?	[R1]/2.5.5.8.1 [R1]/2.4.4.2.9	AZD22: FDT1: O FDT2: O FDT3: O	ZigBee-PRO MM	AZD22: FDT1: O FDT2: O FDT3: O		Click here to enter text.
				ZigBee-PRO	AZD22: FDT1: O FDT2: O FDT3: O		Click here to enter text.
AZD212	Does the device support the optional Backup Source Bind client service of the Binding Manager Object?	[R1]/2.5.5.8.1 [R1]/2.4.3.2.1 0	AZD22: FDT1: O FDT2: O FDT3: O	ZigBee-PRO MM	AZD22: FDT1: O FDT2: O FDT3: O		Click here to enter text.
				ZigBee-PRO	AZD22: FDT1: O FDT2: O FDT3: O		Click here to enter text.
AZD213	Does the device support the optional Backup Source Bind server service of the Binding Manager Object?	[R1]/2.5.5.8.1 [R1]/2.4.4.2.1 0	AZD22: FDT1: O FDT2: O FDT3: O	ZigBee-PRO MM	AZD22: FDT1: O FDT2: O FDT3: O		Click here to enter text.
				ZigBee-PRO	AZD22: FDT1: O FDT2: O FDT3: O		Click here to enter text.
AZD214	Does the device support the optional Recover Source Bind client service of the Binding Manager Object?	[R1]/2.5.5.8.1 [R1]/2.4.3.2.1 1	AZD22: FDT1: O FDT2: O FDT3: O	ZigBee-PRO MM	AZD22: FDT1: O FDT2: O FDT3: O		Click here to enter text.
				ZigBee-PRO	AZD22: FDT1: O FDT2: O FDT3: O		Click here to enter text.
AZD215		[R1]/2.5.5.8.1 [R1]/2.4.4.2.1 1	AZD22: FDT1: O FDT2: O FDT3: O	ZigBee-PRO MM	AZD22: FDT1: O FDT2: O FDT3: O		Click here to enter text.

Item number	Item description	Reference	ZigBee Status	Feature set Support		Additional Constraints	Platform Support
	Does the device support the optional Recover Source Bind server service of the Binding Manager Object?			ZigBee-PRO	AZD22: FDT1: O FDT2: O FDT3: O		Click here to enter text.
AZD29	Does the device support the optional APSME BIND and UNBIND service of the Binding Manager Object?	[R1]/2.5.5.8.1	AZD22: FDT1: O FDT2: O FDT3: O	ZigBee PRO MM	AZD22: FDT1: O FDT2: O FDT3: O		X
				ZigBee-PRO	AZD22: FDT1: O FDT2: O FDT3: O		X
AZD30	Does the device support the mandatory NLME GET, SET and NETWORK DISCOVERY services of the Network Manager Object?	[R1]/2.5.5.9.1	M	ZigBee PRO MM	M		X
				ZigBee-PRO	M		X
AZD31	Does the device support the optional NLME NETWORK FORMATION service of the Network Manager Object?	[R1]/2.5.5.9.1	FDT1: M FDT2: X FDT3: X	ZigBee PRO MM	FDT1: M FDT2: X FDT3: X		X
				ZigBee-PRO	FDT1: M FDT2: X FDT3: X		X
AZD299	Does the device support the optional NLME NETWORK FORMATION service of the DistributedNetwork Service Primitive? (CCB 2137)	[R1]/3.2.2.5	O	ZigBee PRO MM	FDT1: X FDT2: M FDT3: M	Can form independent distributed network on sub-GHz network and a different distributed network on 2.4 GHz. Sub-GHz unique channel list.	X
		[R1]/3.2.2.5	O	ZigBee-PRO	FDT1: X FDT2: M FDT3: M	Can form a distributed network on 2.4 GHz only	X
AZD32		[R1]/2.5.5.9.1	FDT1: X FDT2: M FDT3: M	ZigBee PRO MM	FDT1: X FDT2: M FDT3: M		X

Item number	Item description	Reference	ZigBee Status	Feature set Support		Additional Constraints	Platform Support
				ZigBee-PRO	ZigBee-PRO MM		
	Does the device support the optional NLME JOIN service of the Network Manager Object?			ZigBee-PRO	FDT1: X FDT2: M FDT3: M		X
AZD300	Does the device support the optional NLME START ROUTER service of the Network Manager Object?	[R1]/2.5.5.9.1	FDT1: X FDT2: M FDT3: X	ZigBee-PRO MM	FDT1: X FDT2: M FDT3: X		X
				ZigBee-PRO	FDT1: X FDT2: M FDT3: X		X
AZD33	Does the device support the mandatory NLME LEAVE service of the Network Manager Object?	[R1]/2.5.5.9.1	FDT1: X FDT2: M FDT3: M	ZigBee-PRO MM	FDT1: X FDT2: M FDT3: M		X
				ZigBee-PRO	FDT1: X FDT2: M FDT3: M		X
AZD301	Does the device support the optional NLME PERMIT JOINING service of the Network Manager Object?	[R1]/2.5.5.9.1	FDT1: M FDT2: M FDT3: X	ZigBee-PRO MM	FDT1: M FDT2: M FDT3: X		X
				ZigBee-PRO	FDT1: M FDT2: M FDT3: X		X
AZD34	Does the device support the optional NLME RESET service of the Network Manager Object?	[R1]/2.5.5.9.1	FDT1: O FDT2: O FDT3: O	ZigBee-PRO MM	FDT1: O FDT2: O FDT3: O		X
				ZigBee-PRO	FDT1: O FDT2: O FDT3: O		X
AZD35	Does the device support the optional NLME SYNC service of the Network Manager Object?	[R1]/2.5.5.9.1	FDT1: O FDT2: O FDT3: O	ZigBee-PRO MM	FDT1: X FDT2: X FDT3: M	See clause 8.4.2.1 in this document, Network layer functions, Item number NLF17.	X
				ZigBee-PRO	FDT1: X FDT2: X FDT3: M		X

Item number	Item description	Reference	ZigBee Status	Feature set Support		Additional Constraints	Platform Support
AZD302	Does the device support the mandatory NLME NWK_STATUS service of the Network Manager Object?	[R1]/2.5.5.9.1	M	ZigBee PRO MM	M		X
				ZigBee-PRO	M		X
AZD303	Does the device support the optional NLME ROUTE DISCOVERY service of the Network Manager Object?	[R1]/2.5.5.9.1	FDT1: O FDT2: O FDT3: O	ZigBee PRO MM	FDT1: O FDT2: O FDT3: O		X
				ZigBee-PRO	FDT1: O FDT2: O FDT3: O		X
AZD36	Does the device support the optional Node Manager Object?	[R1]/2.5.5.10.1	FDT1: O FDT2: O FDT3: O	ZigBee PRO MM	FDT1: O FDT2: O FDT3: O		X
				ZigBee-PRO	FDT1: M FDT2: M FDT3: O		X
AZD37	Does the device support the optional Node Manager NWK Discovery client service?	[R1]/2.5.5.10.1	AZD36: FDT1: O FDT2: O FDT3: O	ZigBee PRO MM	AZD36: FDT1: O FDT2: O FDT3: O		Click here to enter text.
				ZigBee-PRO	AZD36: FDT1: O FDT2: O FDT3: O		Click here to enter text.
AZD38	Does the device support the optional Node Manager NWK Discovery server service?	[R1]/2.5.5.10.1	AZD36: FDT1: O FDT2: O FDT3: O	ZigBee PRO MM	AZD36: FDT1: M FDT2: M FDT3: O		X
				ZigBee-PRO	AZD36: FDT1: M FDT2: M FDT3: O		X

Item number	Item description	Reference	ZigBee Status	Feature set Support	Additional Constraints	Platform Support
AZD39	Does the device support the optional Node Manager LQI client service?	[R1]/2.5.5.10.1	AZD36: FDT1: O FDT2: O FDT3: O	ZigBee PRO MM	AZD36: FDT1: O FDT2: O FDT3: O	X
				ZigBee-PRO	AZD36: FDT1: O FDT2: O FDT3: O	X
AZD40	Does the device support the optional Node Manager LQI server service?	[R1]/2.5.5.10.1	AZD36: FDT1: O FDT2: O FDT3: O	ZigBee PRO MM	AZD36: FDT1: M FDT2: M FDT3: O	X
				ZigBee-PRO	AZD36: FDT1: M FDT2: M FDT3: O	X
AZD41	Does the device support the optional Node Manager RTG client service?	[R1]/2.5.5.10.1	AZD36: FDT1: O FDT2: O FDT3: O	ZigBee PRO MM	AZD36: FDT1: O FDT2: O FDT3: O	X
				ZigBee-PRO	AZD36: FDT1: O FDT2: O FDT3: O	X
AZD42	Does the device support the optional Node Manager RTG server service?	[R1]/2.5.5.10.1	AZD36: FDT1: O FDT2: O FDT3: O	ZigBee PRO MM	AZD36: FDT1: O FDT2: O FDT3: O	X
				ZigBee-PRO	AZD36: FDT1: M FDT2: M FDT3: O	X
AZD43	Does the device support the optional Node Manager Bind client service?	[R1]/2.5.5.10.1	AZD36: FDT1: O FDT2: O FDT3: O	ZigBee PRO MM	AZD36: FDT1: O FDT2: O FDT3: O	X
				ZigBee-PRO	AZD36: FDT1: O FDT2: O FDT3: O	X
AZD44		[R1]/2.5.5.10.1	AZD36: FDT1: O FDT2: O FDT3: O	ZigBee PRO MM	AZD36: FDT1: O FDT2: O FDT3: O	Click here to enter text.

Item number	Item description	Reference	ZigBee Status	Feature set Support		Additional Constraints	Platform Support
	Does the device support the optional Node Manager Bind server service?			ZigBee-PRO	AZD36: FDT1: O FDT2: O FDT3: O		X
AZD45	Does the device support the optional Node Manager Leave client service?	[R1]/2.5.5.10.1	AZD36: FDT1: O FDT2: O FDT3: O	ZigBee PRO MM	AZD36: FDT1: O FDT2: O FDT3: O		X
				ZigBee-PRO	AZD36: FDT1: O FDT2: O FDT3: O		X
AZD46	Does the device support the optional Node Manager Leave server service?	[R1]/2.5.5.10.1	AZD36: FDT1: O FDT2: O FDT3: O	ZigBee PRO MM	AZD36: FDT1: M FDT2: M FDT3: O		X
				ZigBee-PRO	AZD36: FDT1: M FDT2: M FDT3: O		X
AZD47	Does the device support the optional Node Manager Direct Join client service?	[R1]/2.5.5.10.1	AZD36: FDT1: O FDT2: O FDT3: O	ZigBee PRO MM	AZD36: FDT1: O FDT2: O FDT3: O		X
				ZigBee-PRO	AZD36: FDT1: O FDT2: O FDT3: O		X
AZD48	Does the device support the optional Node Manager Direct Join server service?	[R1]/2.5.5.10.1	AZD36: FDT1: O FDT2: O FDT3: O	ZigBee PRO MM	X		X
				ZigBee-PRO	X		X
AZD400		[R1]/2.5.5.10.1	AZD36: FDT1: O FDT2: O FDT3: O	ZigBee PRO MM	AZD36: FDT1: M FDT2: M FDT3: X		X

Item number	Item description	Reference	ZigBee Status	Feature set Support		Additional Constraints	Platform Support
	Does the device support the optional Node Manager Permit Joining client service?			ZigBee-PRO	AZD36: FDT1: M FDT2: M FDT3: X		X
AZD401	Does the device support the optional Node Manager Discovery Cache client service?	[R1]/2.5.5.10.1	AZD36: FDT1: O FDT2: O FDT3: O	ZigBee-PRO MM	AZD36: FDT1: O FDT2: O FDT3: O		Click here to enter text.
				ZigBee-PRO	AZD36: FDT1: O FDT2: O FDT3: O		Click here to enter text.
AZD402	Does the device support the optional Node Manager Discovery Cache server service?	[R1]/2.5.5.10.2	AZD36: FDT1: O FDT2: O FDT3: O	ZigBee-PRO MM	AZD36: FDT1: O FDT2: O FDT3: O		Click here to enter text.
				ZigBee-PRO	AZD36: FDT1: O FDT2: O FDT3: O		Click here to enter text.
AZD800	Does the device support the optional Node Manager NWK update client service?	[R1]/2.4.3.3.	AZD36: FDT1: O FDT2: O FDT3: X	ZigBee-PRO MM	AZD36: FDT1: O FDT2: O FDT3: O	The ability to send the Mgmt_NWK_Update_req command in order to request the target to perform an energy scan is mandatory for the Network Channel Manager, and optional for all non Network Channel Manager routers and the coordinator. Applicable to 2.4 GHz channel list.	X
AZD801	Does the device support the optional Node Manager NWK Enhanced update client service?	[R1]/2.4.3.3.10	AZD36: FDT1: X FDT2: M FDT3: O	ZigBee-PRO MM	AZD36: FDT1: X FDT2: M FDT3: O	The ability to send the Mgmt_NWK_Update_req command in order to request the target to perform an energy scan is mandatory for the Network Channel Manager, and optional for all non Network Channel Manager routers and the coordinator. Applicable to sub GHz channel list.	X



Item number	Item description	Reference	ZigBee Status	Feature set Support	Additional Constraints	Platform Support
AZD802	Does the device support the optional Node Manager NWK update server service?	[R1]/2.4.4.3.9	AZD36: FDT1: M FDT2: X FDT3: X	ZigBee PRO MM  AZD36: FDT1: M FDT2: X FDT3: X	The ability for a non Network Channel Manager to receive and process the Mgmt_NWK_Update_req command is mandatory for the network manager and all routers and optional for end devices. Applicable to 2.4 GHz channel list.	X
AZD803	Does the MM device support the Node Manager NWK Enhanced update server service?	[R1]/2.4.3.3.10	AZD36: FDT1: M FDT2: X FDT3: X	ZigBee PRO MM  MM Sub-GHz I/F FDT1: M FDT2: X FDT3: X  MM 2.4 GHz I/F and 2.4GHz Devices  FDT1: X FDT2: X FDT3: X	It's MANDATORY on ALL MM Devices to support Mgmt_NWK_Enhanced Update_req on Sub-GHz interface .  All MM 2.4 GHz interface and 2.4 GHz devices SHALL NOT support Mgmt_NWK_Enhanced Update_req command.	X
AZD804	Does the MM device support the Mgmt_NWK_IEEE_Joining_List client service?	[R1]/2.4.3.3.11	AZD36: FDT1: X FDT2: M FDT3: X	ZigBee PRO MM  AZD36: FDT1: X FDT2: M FDT3: X	Mgmt_NWK_IEEE_Joining_List_req is only required on Sub-GHz devices and networks that support Sub-GHz network routers.  UK doesn't support Sub-GHz routers therefore not required in UK deployed devices.	X
AZD805	Does the MM device support the Mgmt_NWK_IEEE_Joining_List server service?	[R1]/2.4.3.3.11	AZD36: FDT1: M FDT2: X FDT3: X	ZigBee PRO MM  AZD36: FDT1: M FDT2: X FDT3: X	The ability for a non Network Channel Manager to receive and process the Mgmt_NWK_IEEE_Joining_List_req command is mandatory for the network manager, all routers and all end devices for R22. Applicable to Sub GHz and 2.4 GHz channel list.	X
AZD806	Does the MM device support the Channel Change Manager?		AZD36: FDT1:M FDT2: X FDT3:X	ZigBee PRO MM  AZD36: FDT1:M FDT2: X FDT3:X		X

Item number	Item description	Reference	ZigBee Status	Feature set Support		Additional Constraints	Platform Support
AZ807	Does the MM device support the LINK_POWER_DELTA command on Sub-GHz interface?		AZD36: FDT1:M FDT2: X FDT3:M	ZigBee- PRO MM	AZD36: FDT1:M FDT2: X FDT3:M	LINK POWER DELTA command is only supported on MM Coordinator and Sub-GHz end devices on Sub-GHz interface.	X
AZD49	Does the device support the mandatory Configuration Attributes?	[R1]/2.5.6	M	ZigBee- PRO	M		X
				ZigBee- PRO MM	M		X
AZD50	Does the device support the optional Complex Descriptor configuration attribute?	[R1]/2.5.6	O	ZigBee- PRO	O		Click here to enter text.
				ZigBee- PRO MM	O		Click here to enter text.
AZD51	Does the device support the optional User Descriptor configuration attribute?	[R1]/2.5.6	O	ZigBee- PRO	O		Click here to enter text.
				ZigBee- PRO MM	O		Click here to enter text.
AZD52	Does the device support the optional Max Bind configuration attribute?	[R1]/2.5.6	O	ZigBee- PRO	O		Click here to enter text.
				ZigBee- PRO MM	O		Click here to enter text.
AZD53		[R1]/2.5.6	O	ZigBee- PRO	O		Click here to enter text.

Item number	Item description	Reference	ZigBee Status	Feature set Support		Additional Constraints	Platform Support
	Does the device support the optional Master Key configuration attribute?			ZigBee PRO MM	O		Click here to enter text.
AZD54	Does the device support the optional End Device Bind Timeout configuration attribute?	[R1]/2.5.6	FDT1: M FDT2: X FDT3: X	ZigBee-PRO	FDT1: M FDT2: X FDT3: X		X
				ZigBee PRO MM	FDT1: M FDT2: X FDT3: X		X
AZD55	Does the device support the optional Permit Join Duration configuration attribute?	[R1]/2.5.6	FDT1: M FDT2: M FDT3: X	ZigBee-PRO	FDT1: M FDT2: M FDT3: X		X
				ZigBee PRO MM	FDT1: M FDT2: M FDT3: X		X
AZD56	Does the device support the optional NWK Security Level configuration attribute?	[R1]/2.5.6	AZD19: O	ZigBee-PRO	AZD19: O		Click here to enter text.
				ZigBee PRO MM	AZD19: O		Click here to enter text.
AZD57	Does the device support the optional NWK Secure All Frames configuration attribute?	[R1]/2.5.6	AZD19: O	ZigBee-PRO	AZD19: O		X
				ZigBee PRO MM	AZD19: O		X
AZD500	Does the device support the optional NWK Leave Remove Children configuration attribute?	[R1]/2.5.6	AZD19: FDT1: M FDT2: M FDT3: X	ZigBee-PRO	AZD19: FDT1: M FDT2: M FDT3: X		X
				ZigBee PRO MM	AZD19: FDT1: M FDT2: M FDT3: X		X

Item number	Item description	Reference	ZigBee Status	Feature set Support		Additional Constraints	Platform Support
AZD501	Does the device support the optional NWK Broadcast Delivery configuration attribute?	[R1]/2.5.6	FDT1: O FDT2: O FDT3: X	ZigBee-PRO	FDT1: O FDT2: O FDT3: X		X
				ZigBee-PRO MM	FDT1: O FDT2: O FDT3: X		X
AZD502	Does the device support the optional NWK Transaction Persistence Time configuration attribute?	[R1]/2.5.6	FDT1: O FDT2: O FDT3: X	ZigBee-PRO	FDT1: O FDT2: O FDT3: X		X
				ZigBee-PRO MM	FDT1: O FDT2: O FDT3: X		X
AZD503	Does the device support the optional NWK Indirect Poll Rate configuration attribute?	[R1]/2.5.6	FDT1: X FDT2: X FDT3: M	ZigBee-PRO	FDT1: X FDT2: X FDT3: M		X
				ZigBee-PRO MM	FDT1: X FDT2: X FDT3: M		X
AZD504	Does the device support the optional Max Associations configuration attribute?	[R1]/2.5.6	FDT1: O FDT2: O FDT3: X	ZigBee-PRO	FDT1: O FDT2: O FDT3: X		Click here to enter text.
				ZigBee-PRO MM	FDT1: O FDT2: O FDT3: X		Click here to enter text.
AZD505	Does the device support the optional NWK Direct Join Addresses configuration attribute?	[R1]/2.5.6	FDT1: O FDT2: O FDT3: X	ZigBee-PRO	FDT1: O FDT2: O FDT3: X		Click here to enter text.
				ZigBee-PRO MM	FDT1: O FDT2: O FDT3: X		Click here to enter text.

Item number	Item description	Reference	ZigBee Status	Feature set Support		Additional Constraints	Platform Support
AZD506	Does the device support the optional Parent Link Retry Threshold configuration attribute?	[R1]/2.5.6	FDT1: X FDT2: O FDT3: O	ZigBee-PRO	FDT1: X FDT2: O FDT3: O		X
				ZigBee-PRO MM	FDT1: X FDT2: O FDT3: O		X
AZD507	Does the device support the mandatory end device timeout Rejoin Interval configuration attribute?  (CCB 2144)	[R1]/3.6.10.3, 3.6.1.4.3.1	FDT1: X FDT2: O FDT3: O	ZigBee-PRO	FDT1: X FDT2: O FDT3: O		X
				ZigBee-PRO MM	FDT1: X FDT2: O FDT3: O		X
AZD508	Does the device support the optional Max end device timeout Rejoin Interval configuration attribute?  (CCB2144)	[R1]/3.6.10.3, 3.6.1.4.3.1	FDT1: X FDT2: O FDT3: O	ZigBee-PRO	FDT1: X FDT2: O FDT3: O		X
				ZigBee-PRO ZigBee-PRO MM	FDT1: X FDT2: O FDT3: O		X
AZD509	When the routing procedure specifies that the NSDU is to be transmitted it is compliant to R22 per section 3.2.1.1.3?	[R1]3.2.1.1.3	FDT1: M FDT2: M FDT3: M	ZigBee-PRO ZigBee-PRO MM	FDT1: M FDT2: M FDT3: M		X
AZD510	Does the device support Network Management Data ChannelList Structure to support one or more MAC interfaces?	[R1]3.2.2.2.1	FDT1: X FDT2: O FDT3: O	ZigBee-PRO ZigBee-PRO MM	FDT1: X FDT2: O FDT3: O		X
AZD511	Does the device support Energy DetectChannelInfo defined in Table 3.9?	[R1]3.2.2.2.3	FDT1: X FDT2: O FDT3: O	ZigBee-PRO ZigBee-PRO MM	FDT1: X FDT2: O FDT3: O		X

Item number	Item description	Reference	ZigBee Status	Feature set Support	Additional Constraints	Platform Support
AZD512	Does the device properly support NLME-NETWORK-DISCOVERY request and Request primitive defined in Table 3.10?	[R1]3.2.2.3.1	FDT1: X FDT2: O FDT3: O	ZigBee-PRO ZigBee PROMB	FDT1: X FDT2: O FDT3: O	X
AZD513	Does the device properly support NLME-NETWORK_FORMATION request and response	[R1]3.2.2.5.3	FDT1: X FDT2: O FDT3: O	ZigBee-PRO ZigBee PRO MM	FDT1: X FDT2: O FDT3: O	X
AZD514	Does the device properly support NLME-ED-SCAN request and response?	[R1] 3.2.2.12.2	FDT1: X FDT2: O FDT3: O	ZigBee-PRO ZigBee PRO MM	FDT1: X FDT2: O FDT3: O	X
AZD515	Does the device support NLME-SET-INTERFACE command and response?	[R1]3.2.2.36	FDT1: X FDT2: O FDT3: O	ZigBee-PRO ZigBee PRO MM	FDT1: X FDT2: O FDT3: O	X
AZD516	Does the device support NLME-GET-INTERFACE command and response?	[R1]3.2.2.37	FDT1: X FDT2: O FDT3: O	ZigBee-PRO ZigBee PRO MM	FDT1: X FDT2: O FDT3: O	X
AZD517	Does the device support Verify Link Cost Command?	[R1]3.4.13	FDT1: X FDT2: O FDT3: O	ZigBee-PRO ZigBee PRO MM	FDT1: X FDT2: O FDT3: O	X
AZD518	Does the device support Power Negotiation on sub GHz channels?	[R1]3.6.11	FDT1: X FDT2: O FDT3: O	ZigBee-PRO	FDT1: X FDT2: O FDT3: O	X

Item number	Item description	Reference	ZigBee Status	Feature set Support		Additional Constraints	Platform Support

592

### 10.6.3.1.6 ZigBee Application Framework functions

Item number	Item description	Reference	ZigBee Status	Feature set Support		Additional Constraints	Platform Support
AAF2	Does the device support the mandatory ZigBee Descriptor structures?	[R1]/2.3.2	M	ZigBee PRO MM	M		X
				ZigBee-PRO	M		X
AAF3	Does the device support the optional ZigBee Complex Descriptor structure?	[R1]/2.3.2	O	ZigBee PRO MM	O		Click here to enter text.
				ZigBee-PRO	O		Click here to enter text.
AAF4	Does the device support the optional ZigBee User Descriptor structure?	[R1]/2.3.2	O	ZigBee PRO MM	O		Click here to enter text.
				ZigBee-PRO	O		Click here to enter text.
AAF5	Does the device support the transmission of descriptors?	[R1]/2.3.2.1	M	ZigBee PRO MM	M		X
				ZigBee-PRO	M		X

593